


Series Name: Imix / Track Spotlight

Project name:



Model No: MIL40103T

Location:

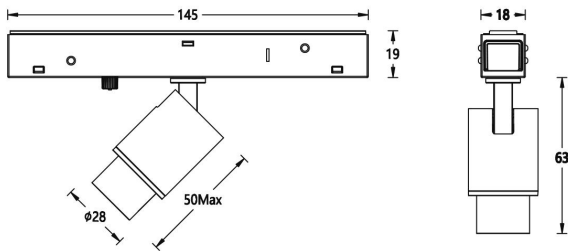

6°

40°



Specification

LED Source	: LED SMD
CCT	: 3000K/4000K
CRI	: Ra 97
SDCM	: ≤ 2
Life Span	: >50000h-L90/B10
Wattage	: 3W
Beam	: 6°-40°
Input Voltage	: DC 24V
Dimming Option	: Built-in knob dimming (dimming range 0-100%)
Installation	: Four-wire three-circuit low-voltage track
Adjustment Range	: Horizontal 0° ~ 350°, Vertical 0° ~ 90°
Material	: Integrated aluminum alloy lamp body
Finish and Color	: Anodizing/Anti-corrosion electrostatic spraying
	Oxidized Black (YB) /Matt White(MWT)
IP Rating	: IP20

Accessories Available



CE3.3A-24SH-D
CV Driver 80W



ME2.5A-24SL
CV Driver 60W



MT4-2201
Power Input Terminal



MT4-2202
"I" shape Connector



MT4-L2205M
MT4-L2210M
MT4-L2220M
Surface-mounted Track



MT4-RL2205M
MT4-RL2210M
MT4-RL2220M
Recessed Track