



Products Series Sek / Guide rail remote control light **Project Name**

Model No. MSL-V6 **Location**

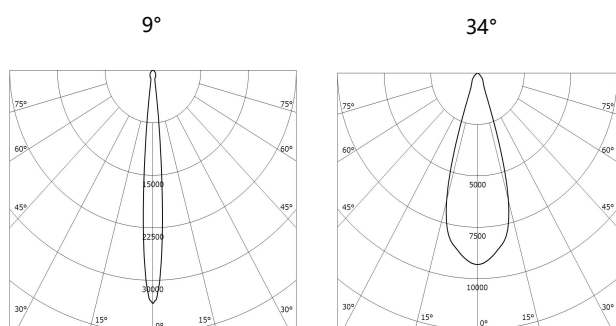

Product Accessories

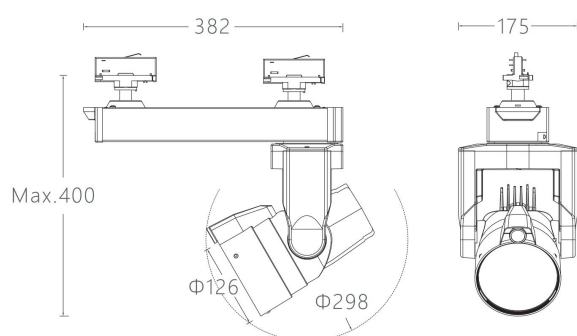

MS-V-OP0022
Honeycomb



MS-V-OP0027
Light Catcher

Description

Light Source type	: LED COB
CCT	: 2700K/3000K/3500K/4000K/5000K
CRI	: Ra 93
LED Lifetime	: >50000h (TM-21 standard)
UV Relative Content	: <1μW/lm
Blue light hazard	: RG1(Low Risk)
Wattage	: 55W (60W with Motors)
Beam angle	: 9°-34° (App Focus)
Input power	: 220 - 240V ~ 50/60Hz
Control mode	: APP Dimming and color adjustment
Dimming range	: 1%-100%
Installation	: Three-circuit rail-mounted
Adjustment Range	: Horizontal -90° ~ +90°, Vertical -90° ~ +90°
Base Material	: Aluminum Alloy Die-Cast Lamp Body
Surface Finish	: Electrostatic Powder Coating;
Product Color	: Black/White (Optional)
Protection Rating	: IP20
Product Weight	: 3.8Kg
Operating APP	: SALIOT
Communication distance	: Device-to-Device 20m
Remove Devices	: iOS 10 or later (iPhone, iPad)
Special Function	: infrared tracking and positioning