

Mayalit



Disclaimer: The appearance, colors, and specifications of the products listed in this book are for reference only. The actual products shipped by the company shall prevail.
Mayalit Lighting reserves the right to modify or cancel the relevant specifications and information in this book.
Consultation Hotline: 0752-5333003
Official Website: <http://www.mayalit.com/>



Sek

REMOTE CONTROLLED TRACK SPOTLIGHT

A remote controlled fixture with unlimited potential.



Sek

Remote Controlled Track Spotlight

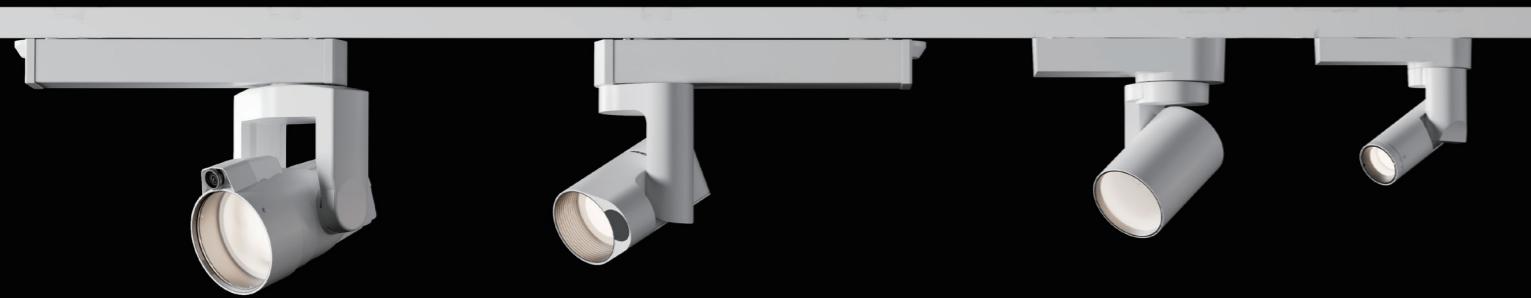
Mayalit





Sek

Remote Controlled Track Spotlight

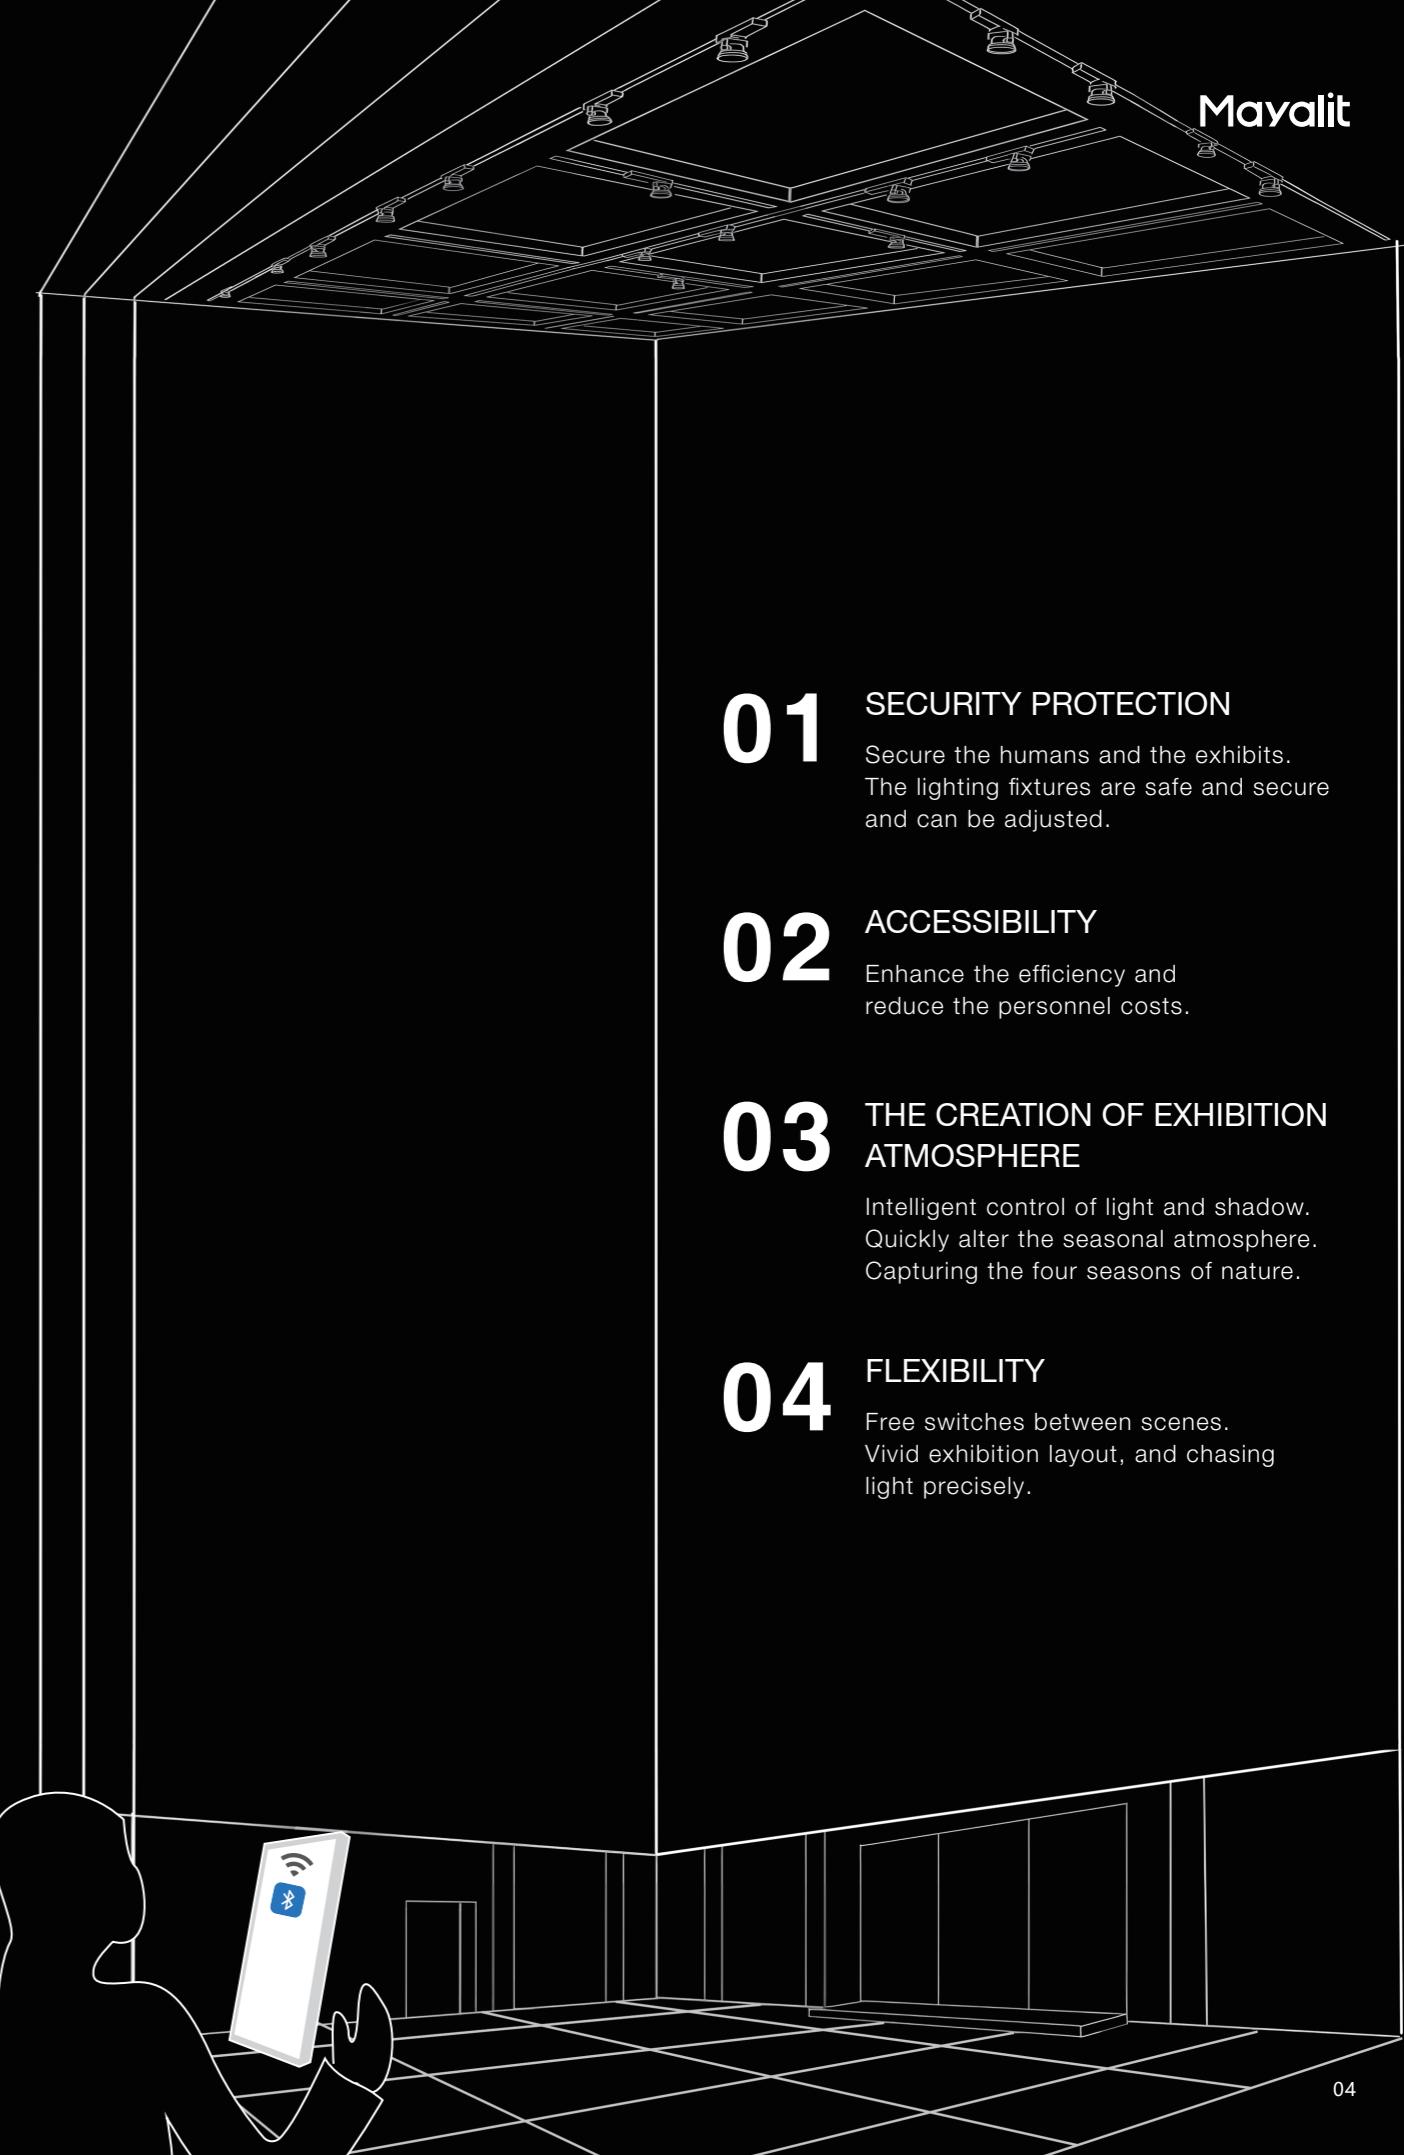


INTELLIGENT CONTROL, EASILY
CONTROL THE LIGHT AND
SHADOW AT YOUR FINGERTIPS

Sek

REMOTE CONTROLLED TRACK LIGHT
EMPOWERED BY SALIOT

The Sek series of intelligent remote-controlled track spotlights is a high-end lighting product that combines intelligence and precision, specially designed for exhibition spaces. The product features a minimalist design language with a refined appearance and powerful functionality, making it suitable for art galleries, museums and various temporary exhibition spaces. The Sek series offers a variety of power options and supports five-dimensional intelligent control of horizontal rotation, vertical tilt, brightness, color temperature and Adjustment to meet the flexible lighting needs of different exhibition application.



01 SECURITY PROTECTION

Secure the humans and the exhibits.
The lighting fixtures are safe and secure
and can be adjusted.

02 ACCESSIBILITY

Enhance the efficiency and
reduce the personnel costs.

03 THE CREATION OF EXHIBITION ATMOSPHERE

Intelligent control of light and shadow.
Quickly alter the seasonal atmosphere.
Capturing the four seasons of nature.

04 FLEXIBILITY

Free switches between scenes.
Vivid exhibition layout, and chasing
light precisely.



ULTRA-THIN OPTICS

1mm ultra-thin Fresnel zoom lens
Up to 98% transmittance, reducing optical
loss Clear, natural and transparent light spots.



Micron-level precision machining
1mm ultra-thin Fresnel lens

VISUAL ANTI-GLARE

Fresnel pattern superimposed with soft light technology.
Gaussian distribution of light spots.
The light transitions smoothly, and the anti-glare effect is more excellent





VISUAL ANTI-GLARE

Achieved by alternating dual-color temperature light sources.

Smooth transition between 2700-5000K light spots.

No color difference in appearance, improving light color consistency



2700K

5000K



Sek

Remote Controlled Track Spotlight

Mayalit



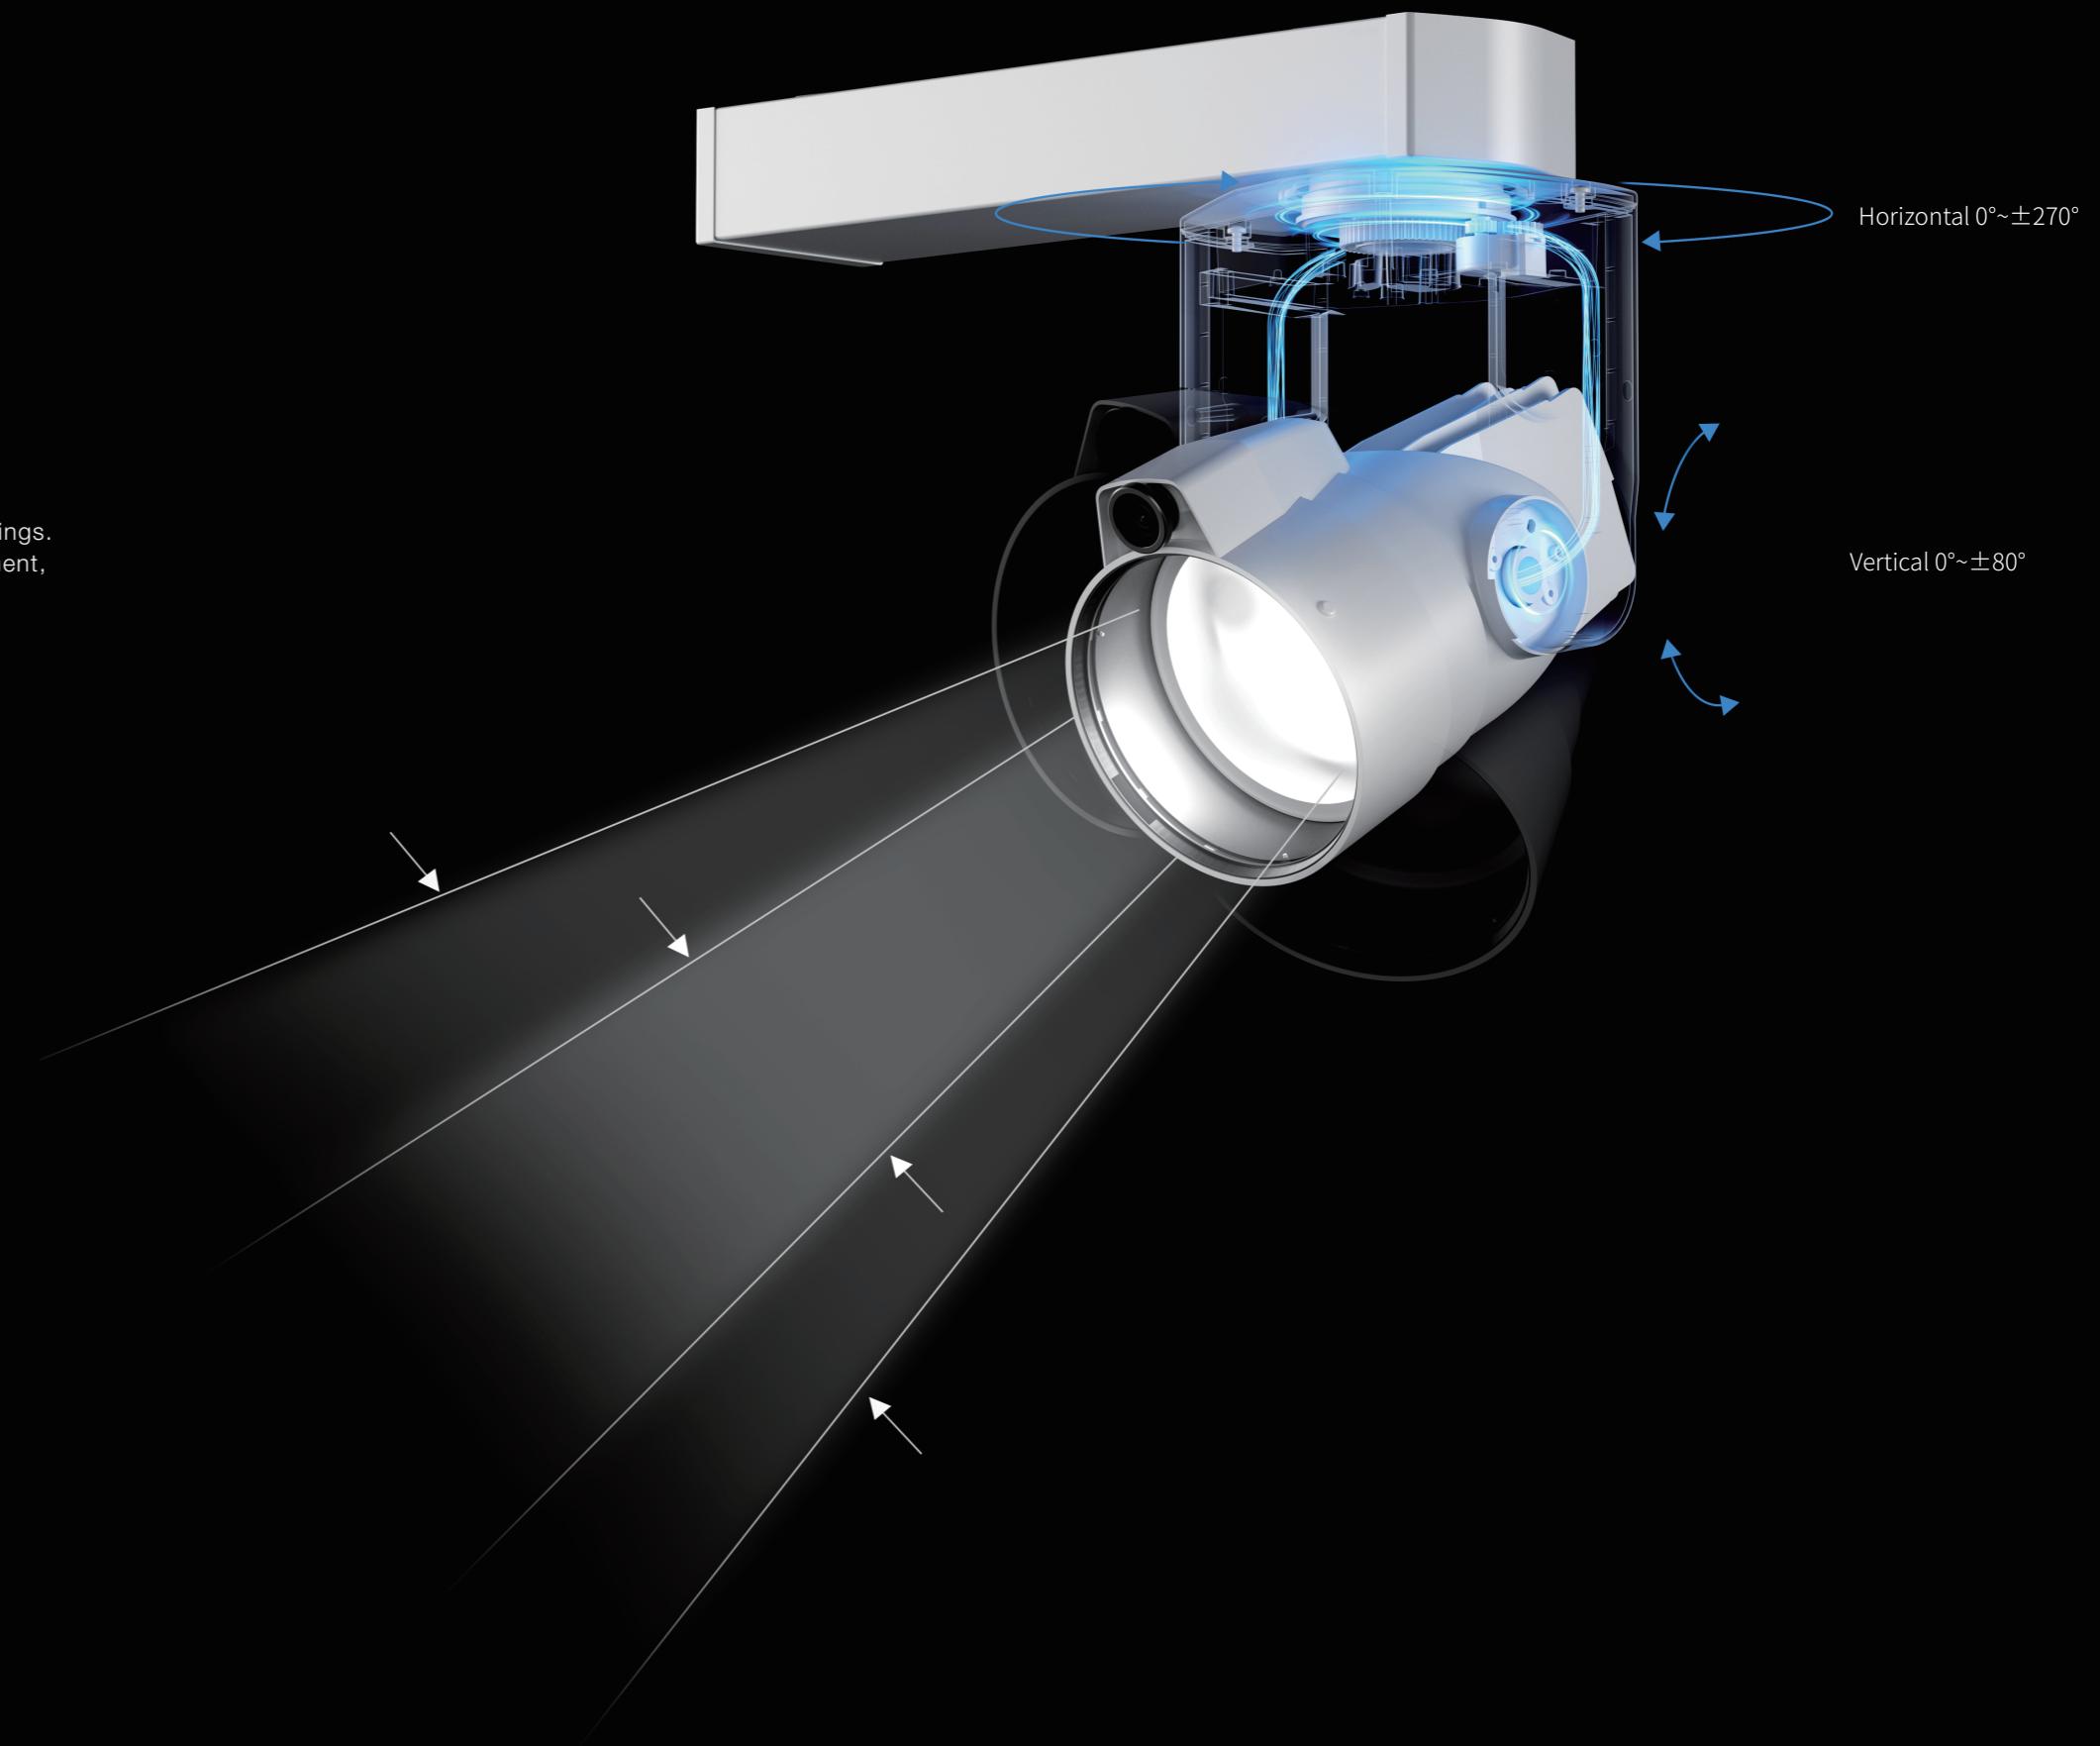


Sek

Remote Controlled Track Spotlight

PRECISION THREE-AXIS LINKAGE

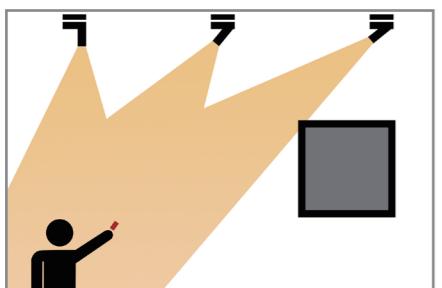
X, Y, and Z axis motors linked with precision bearings. Enables horizontal rotation, vertical angle adjustment, and lens zoom to freely adjust the illumination direction in three-dimensional space



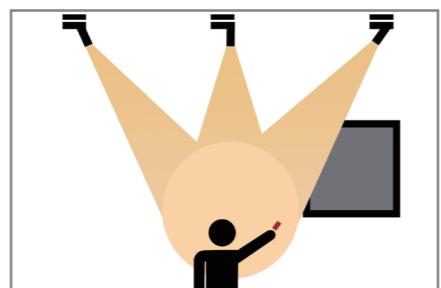


AUTOMATIC LIGHTTRACKING

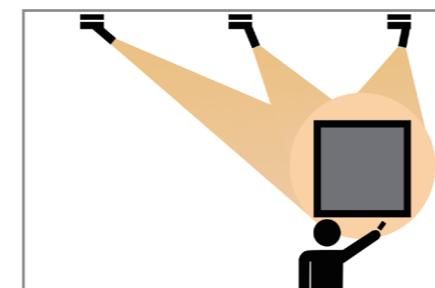
Uses infrared positioning technology
Lights can intelligently identify and track
Automatically adjusts the direction and position of illumination



1. Set the APP corresponding to the lighting fixture to lighttracking mode, turn on the light tracker, and select the channel that matches the APP.



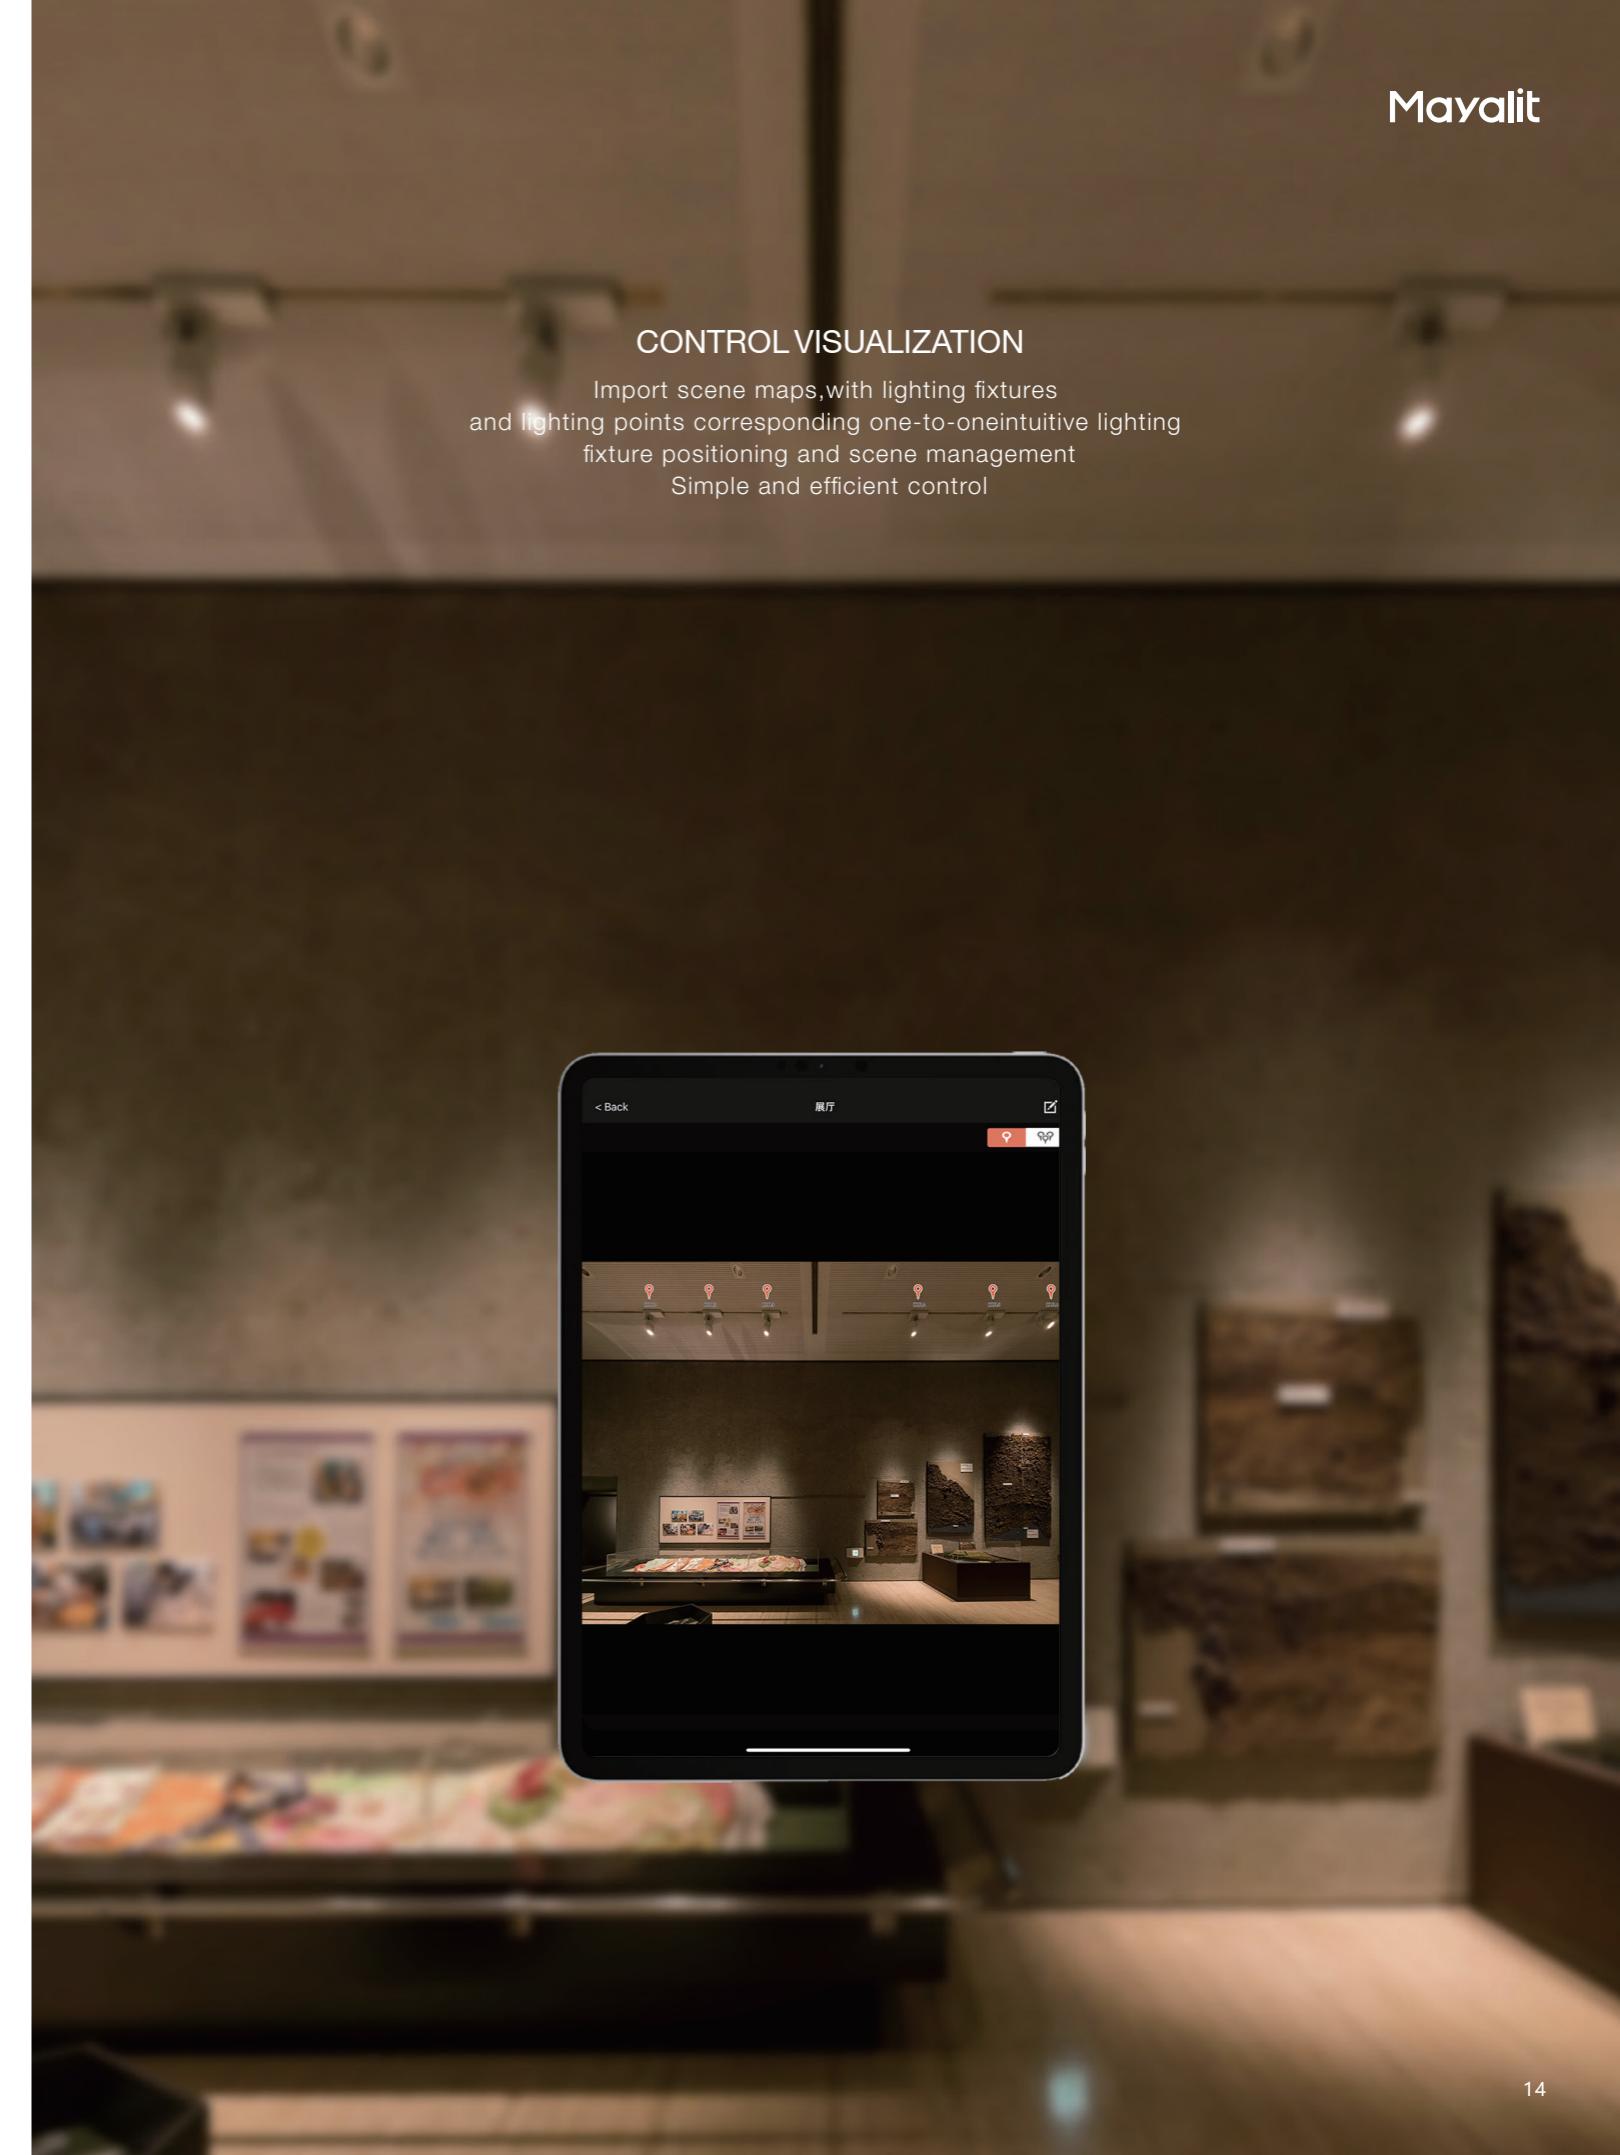
2. Aim the light tracker probe at the light head probe.



3. The light head will follow the position of the spotlight to the desired location.

CONTROL VISUALIZATION

Import scene maps, with lighting fixtures and lighting points corresponding one-to-one intuitive lighting fixture positioning and scene management
Simple and efficient control



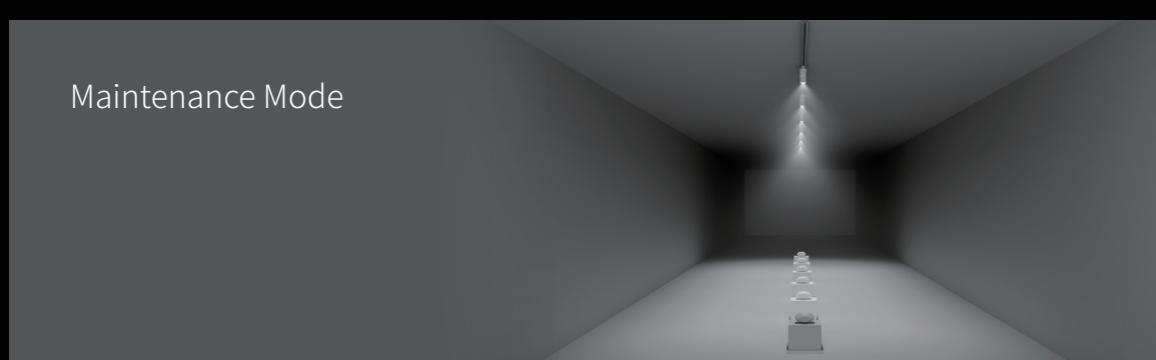


SCENE AUTOMATION

Different lighting modes can be preset to suit different scenes.

One-click switching for quick application.

Up to 16 scenes can be set and sorted for automatic operation, adding more creativity and possibilities to curation.

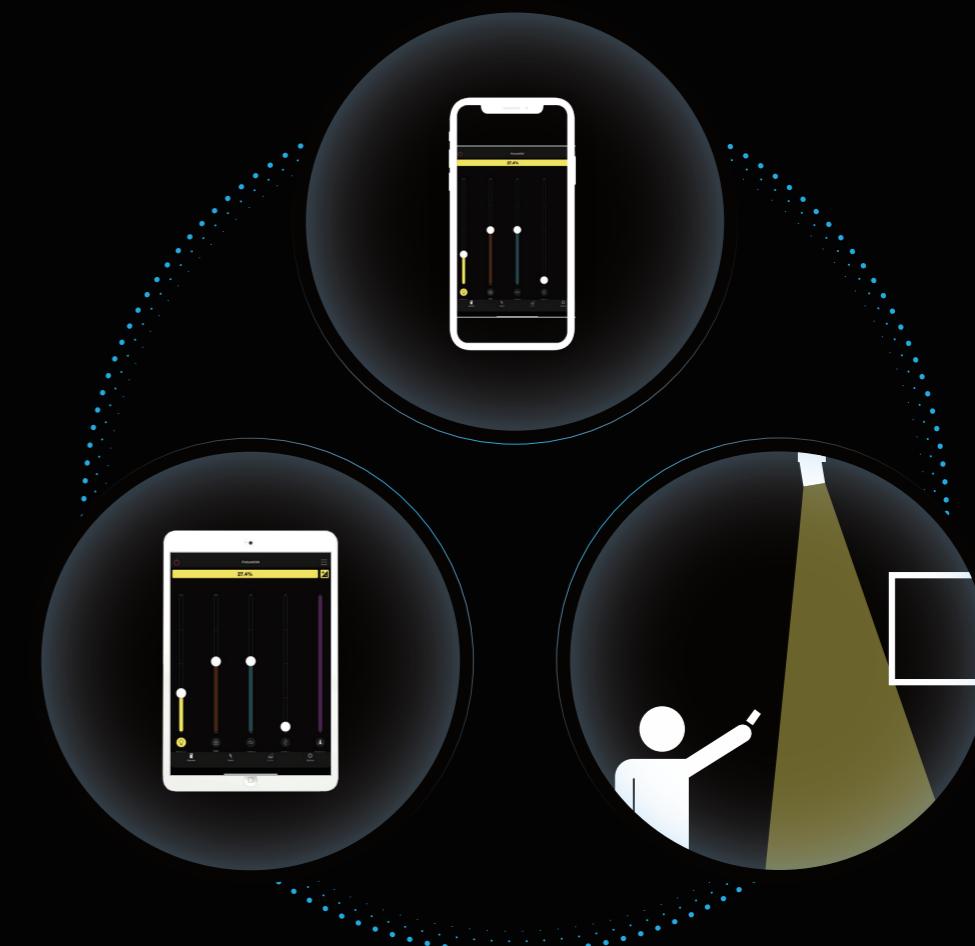


MULTIPLE CONTROL TERMINALS

Supports multiple terminal controls with a simple and intuitive UI interface.

Can be used with iOS and Android mobile devices for broad compatibility.

Cloud and local data backup ensures information security, and devices can be seamlessly switched.





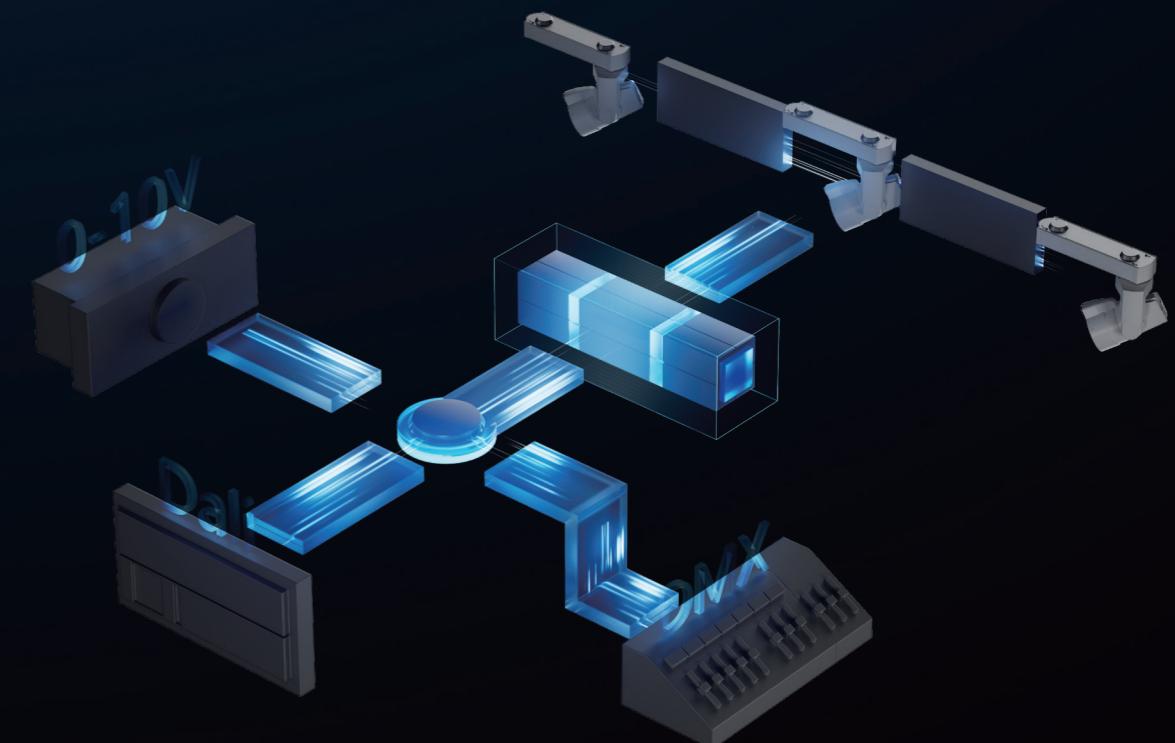
MESH SELF-ORGANIZING NETWORK TECHNOLOGY

Bluetooth Mesh automatic networking technology.
Easy to use with stable signal.

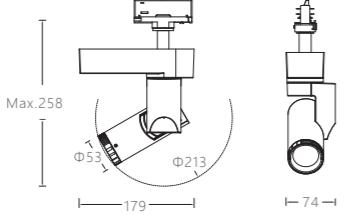






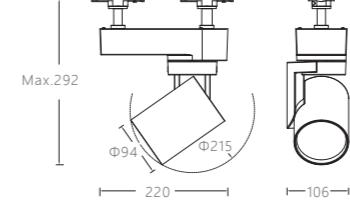



SYSTEM DIVERSIFICATION AND EXPANSION

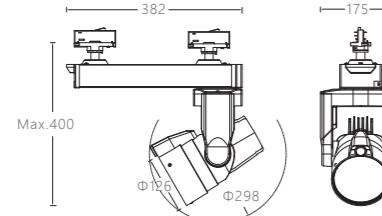




Compatible with mainstream dimming systems such as DALI and DMX.
Can be connected to and integrated into large venue, intelligent control systems, enabling smart interconnection and eliminating system compatibility issues.

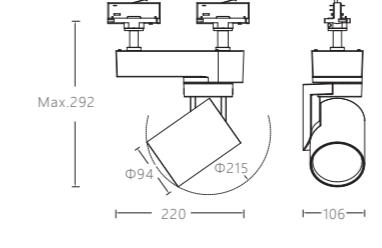






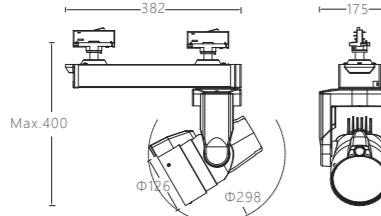




Note: A repeater must be purchased separately for compatibility with the above systems. Depending on the lighting fixture, DMX control can control brightness, colour temperature, Adjustment, horizontal rotation, tilt angle, while DALI control only controls brightness and colour temperature.

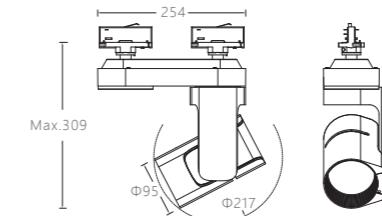


		<table border="1"> <tr><td>Model</td><td>MSL-S3T</td></tr> <tr><td>Wattage</td><td>16W</td></tr> <tr><td>Input Voltage</td><td>220-240V~50/60Hz</td></tr> <tr><td>Mounting Type</td><td>Track-mounted</td></tr> <tr><td>Adjustment</td><td>Horizontal 0°~180°, Vertical -90°~+90°</td></tr> <tr><td>CCT</td><td>2700K-5000K</td></tr> <tr><td>Weight</td><td>0.8Kg</td></tr> <tr><td>Finish</td><td>Black/White</td></tr> </table>	Model	MSL-S3T	Wattage	16W	Input Voltage	220-240V~50/60Hz	Mounting Type	Track-mounted	Adjustment	Horizontal 0°~180°, Vertical -90°~+90°	CCT	2700K-5000K	Weight	0.8Kg	Finish	Black/White																				
Model	MSL-S3T																																					
Wattage	16W																																					
Input Voltage	220-240V~50/60Hz																																					
Mounting Type	Track-mounted																																					
Adjustment	Horizontal 0°~180°, Vertical -90°~+90°																																					
CCT	2700K-5000K																																					
Weight	0.8Kg																																					
Finish	Black/White																																					
Mark																																						
Accessories	/																																					
Accessory Picture	/																																					
Accessory Model	/																																					
CCT	3000K																																					
CRI	Ra93																																					
Beam Angle	18°-28°																																					
Luminaire Lumen	18°/554lm	28°/600lm																																				
Photometric Curve	 <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>4371</td><td>0.31</td></tr> <tr><td>2</td><td>1093</td><td>0.62</td></tr> <tr><td>3</td><td>486</td><td>0.93</td></tr> <tr><td>4</td><td>273</td><td>1.24</td></tr> <tr><td>5</td><td>175</td><td>1.55</td></tr> </table>  <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>2215</td><td>0.47</td></tr> <tr><td>2</td><td>554</td><td>0.94</td></tr> <tr><td>3</td><td>246</td><td>1.41</td></tr> <tr><td>4</td><td>138</td><td>1.88</td></tr> <tr><td>5</td><td>89</td><td>2.35</td></tr> </table>		H(m)	E(lx)	D(m)	1	4371	0.31	2	1093	0.62	3	486	0.93	4	273	1.24	5	175	1.55	H(m)	E(lx)	D(m)	1	2215	0.47	2	554	0.94	3	246	1.41	4	138	1.88	5	89	2.35
H(m)	E(lx)	D(m)																																				
1	4371	0.31																																				
2	1093	0.62																																				
3	486	0.93																																				
4	273	1.24																																				
5	175	1.55																																				
H(m)	E(lx)	D(m)																																				
1	2215	0.47																																				
2	554	0.94																																				
3	246	1.41																																				
4	138	1.88																																				
5	89	2.35																																				
CCT	4000K																																					
Luminaire Lumen	18°/731lm	28°/792lm																																				
Photometric Curve	 <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>5754</td><td>0.31</td></tr> <tr><td>2</td><td>1436</td><td>0.62</td></tr> <tr><td>3</td><td>638</td><td>0.93</td></tr> <tr><td>4</td><td>359</td><td>1.24</td></tr> <tr><td>5</td><td>230</td><td>1.55</td></tr> </table>  <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>2927</td><td>0.47</td></tr> <tr><td>2</td><td>732</td><td>0.94</td></tr> <tr><td>3</td><td>325</td><td>1.41</td></tr> <tr><td>4</td><td>183</td><td>1.88</td></tr> <tr><td>5</td><td>117</td><td>2.35</td></tr> </table>		H(m)	E(lx)	D(m)	1	5754	0.31	2	1436	0.62	3	638	0.93	4	359	1.24	5	230	1.55	H(m)	E(lx)	D(m)	1	2927	0.47	2	732	0.94	3	325	1.41	4	183	1.88	5	117	2.35
H(m)	E(lx)	D(m)																																				
1	5754	0.31																																				
2	1436	0.62																																				
3	638	0.93																																				
4	359	1.24																																				
5	230	1.55																																				
H(m)	E(lx)	D(m)																																				
1	2927	0.47																																				
2	732	0.94																																				
3	325	1.41																																				
4	183	1.88																																				
5	117	2.35																																				


		<table border="1"> <tr><td>Model</td><td>MSL-S6T</td></tr> <tr><td>Wattage</td><td>31W</td></tr> <tr><td>Input Voltage</td><td>220-240V~50/60Hz</td></tr> <tr><td>Mounting Type</td><td>Track-mounted</td></tr> <tr><td>Adjustment</td><td>Horizontal -90°~+90°, Vertical -90°~+90°</td></tr> <tr><td>CCT</td><td>2700K-5000K</td></tr> <tr><td>Weight</td><td>1.9Kg</td></tr> <tr><td>Finish</td><td>Black/White</td></tr> </table>	Model	MSL-S6T	Wattage	31W	Input Voltage	220-240V~50/60Hz	Mounting Type	Track-mounted	Adjustment	Horizontal -90°~+90°, Vertical -90°~+90°	CCT	2700K-5000K	Weight	1.9Kg	Finish	Black/White																				
Model	MSL-S6T																																					
Wattage	31W																																					
Input Voltage	220-240V~50/60Hz																																					
Mounting Type	Track-mounted																																					
Adjustment	Horizontal -90°~+90°, Vertical -90°~+90°																																					
CCT	2700K-5000K																																					
Weight	1.9Kg																																					
Finish	Black/White																																					
Mark																																						
Accessories	/																																					
Accessory Picture	/																																					
Accessory Model	/																																					
CCT	3000K																																					
CRI	Ra94																																					
Beam Angle	17°-27°																																					
Luminaire Lumen	17°/1424lm	27°/1555lm																																				
Photometric Curve	 <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>13052</td><td>0.29</td></tr> <tr><td>2</td><td>3263</td><td>0.58</td></tr> <tr><td>3</td><td>1450</td><td>0.87</td></tr> <tr><td>4</td><td>816</td><td>1.16</td></tr> <tr><td>5</td><td>522</td><td>1.45</td></tr> </table>  <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>6579</td><td>0.46</td></tr> <tr><td>2</td><td>1645</td><td>0.92</td></tr> <tr><td>3</td><td>731</td><td>1.38</td></tr> <tr><td>4</td><td>411</td><td>1.84</td></tr> <tr><td>5</td><td>263</td><td>2.30</td></tr> </table>		H(m)	E(lx)	D(m)	1	13052	0.29	2	3263	0.58	3	1450	0.87	4	816	1.16	5	522	1.45	H(m)	E(lx)	D(m)	1	6579	0.46	2	1645	0.92	3	731	1.38	4	411	1.84	5	263	2.30
H(m)	E(lx)	D(m)																																				
1	13052	0.29																																				
2	3263	0.58																																				
3	1450	0.87																																				
4	816	1.16																																				
5	522	1.45																																				
H(m)	E(lx)	D(m)																																				
1	6579	0.46																																				
2	1645	0.92																																				
3	731	1.38																																				
4	411	1.84																																				
5	263	2.30																																				
CCT	4000K																																					
Luminaire Lumen	17°/1521lm	27°/1665lm																																				
Photometric Curve	 <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>13979</td><td>0.29</td></tr> <tr><td>2</td><td>3495</td><td>0.58</td></tr> <tr><td>3</td><td>1553</td><td>0.87</td></tr> <tr><td>4</td><td>874</td><td>1.16</td></tr> <tr><td>5</td><td>559</td><td>1.45</td></tr> </table>  <table border="1"> <tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr> <tr><td>1</td><td>7082</td><td>0.45</td></tr> <tr><td>2</td><td>1771</td><td>0.90</td></tr> <tr><td>3</td><td>787</td><td>1.35</td></tr> <tr><td>4</td><td>443</td><td>1.80</td></tr> <tr><td>5</td><td>283</td><td>2.25</td></tr> </table>		H(m)	E(lx)	D(m)	1	13979	0.29	2	3495	0.58	3	1553	0.87	4	874	1.16	5	559	1.45	H(m)	E(lx)	D(m)	1	7082	0.45	2	1771	0.90	3	787	1.35	4	443	1.80	5	283	2.25
H(m)	E(lx)	D(m)																																				
1	13979	0.29																																				
2	3495	0.58																																				
3	1553	0.87																																				
4	874	1.16																																				
5	559	1.45																																				
H(m)	E(lx)	D(m)																																				
1	7082	0.45																																				
2	1771	0.90																																				
3	787	1.35																																				
4	443	1.80																																				
5	283	2.25																																				

 		Model MSL-V6T Wattage 58W Input Voltage 220-240V~50/60Hz Mounting Type Track-mounted Adjustment Horizontal -270°~+270°, Vertical -80°~+80° CCT 2700K-5000K Weight 3.8Kg Finish Black/White																																																
Mark       																																																		
Accessories Honeycomb Light Tracker																																																		
Accessory Picture  																																																		
Accessory Model MS-V-OP0022 MS-V-OP0027																																																		
CCT 3000K																																																		
CRI Ra93																																																		
Beam Angle 14°-40°																																																		
Luminaire Lumen 14°/2150lm 40°/2440lm																																																		
Photometric Curve  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400</td> <td>0.24</td> <td></td> </tr> <tr> <td>2</td> <td>2850</td> <td>0.48</td> <td></td> </tr> <tr> <td>3</td> <td>1267</td> <td>0.72</td> <td></td> </tr> <tr> <td>4</td> <td>713</td> <td>0.96</td> <td></td> </tr> <tr> <td>5</td> <td>456</td> <td>1.20</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4860</td> <td>0.69</td> <td></td> </tr> <tr> <td>2</td> <td>1215</td> <td>1.38</td> <td></td> </tr> <tr> <td>3</td> <td>540</td> <td>2.07</td> <td></td> </tr> <tr> <td>4</td> <td>304</td> <td>2.76</td> <td></td> </tr> <tr> <td>5</td> <td>194</td> <td>3.45</td> <td></td> </tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	11400	0.24		2	2850	0.48		3	1267	0.72		4	713	0.96		5	456	1.20			H(m)	E(lx)	D(m)	1	4860	0.69		2	1215	1.38		3	540	2.07		4	304	2.76		5	194	3.45		CCT 4000K	
	H(m)	E(lx)	D(m)																																															
1	11400	0.24																																																
2	2850	0.48																																																
3	1267	0.72																																																
4	713	0.96																																																
5	456	1.20																																																
	H(m)	E(lx)	D(m)																																															
1	4860	0.69																																																
2	1215	1.38																																																
3	540	2.07																																																
4	304	2.76																																																
5	194	3.45																																																
Luminaire Lumen 14°/2480lm 40°/2820lm																																																		
Photometric Curve  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12490</td> <td>0.24</td> <td></td> </tr> <tr> <td>2</td> <td>3123</td> <td>0.48</td> <td></td> </tr> <tr> <td>3</td> <td>1388</td> <td>0.72</td> <td></td> </tr> <tr> <td>4</td> <td>781</td> <td>0.96</td> <td></td> </tr> <tr> <td>5</td> <td>500</td> <td>1.20</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5410</td> <td>0.70</td> <td></td> </tr> <tr> <td>2</td> <td>1353</td> <td>1.40</td> <td></td> </tr> <tr> <td>3</td> <td>601</td> <td>2.10</td> <td></td> </tr> <tr> <td>4</td> <td>338</td> <td>2.80</td> <td></td> </tr> <tr> <td>5</td> <td>216</td> <td>3.50</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	12490	0.24		2	3123	0.48		3	1388	0.72		4	781	0.96		5	500	1.20			H(m)	E(lx)	D(m)	1	5410	0.70		2	1353	1.40		3	601	2.10		4	338	2.80		5	216	3.50		
	H(m)	E(lx)	D(m)																																															
1	12490	0.24																																																
2	3123	0.48																																																
3	1388	0.72																																																
4	781	0.96																																																
5	500	1.20																																																
	H(m)	E(lx)	D(m)																																															
1	5410	0.70																																																
2	1353	1.40																																																
3	601	2.10																																																
4	338	2.80																																																
5	216	3.50																																																

 		Model MSL-S6 Wattage 31W Input Voltage 220-240V~50/60Hz Mounting Type Track-mounted Adjustment Horizontal -90°~+90°, Vertical -90°~+90° CCT 3000K/3500K/4000K Weight 1.8Kg Finish Black/White																																																
Mark     																																																		
Accessories /																																																		
Accessory Picture /																																																		
Accessory Model /																																																		
CCT 3000K																																																		
CRI Ra92																																																		
Beam Angle 7°-14°																																																		
Luminaire Lumen 7°/1208lm 14°/210lm																																																		
Photometric Curve  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>58375</td> <td>0.12</td> <td></td> </tr> <tr> <td>2</td> <td>14594</td> <td>0.24</td> <td></td> </tr> <tr> <td>3</td> <td>6486</td> <td>0.36</td> <td></td> </tr> <tr> <td>4</td> <td>3648</td> <td>0.48</td> <td></td> </tr> <tr> <td>5</td> <td>2335</td> <td>0.60</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>17449</td> <td>0.25</td> <td></td> </tr> <tr> <td>2</td> <td>4362</td> <td>0.50</td> <td></td> </tr> <tr> <td>3</td> <td>1939</td> <td>0.75</td> <td></td> </tr> <tr> <td>4</td> <td>1091</td> <td>1.00</td> <td></td> </tr> <tr> <td>5</td> <td>698</td> <td>1.25</td> <td></td> </tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	58375	0.12		2	14594	0.24		3	6486	0.36		4	3648	0.48		5	2335	0.60			H(m)	E(lx)	D(m)	1	17449	0.25		2	4362	0.50		3	1939	0.75		4	1091	1.00		5	698	1.25		CCT 4000K	
	H(m)	E(lx)	D(m)																																															
1	58375	0.12																																																
2	14594	0.24																																																
3	6486	0.36																																																
4	3648	0.48																																																
5	2335	0.60																																																
	H(m)	E(lx)	D(m)																																															
1	17449	0.25																																																
2	4362	0.50																																																
3	1939	0.75																																																
4	1091	1.00																																																
5	698	1.25																																																
Luminaire Lumen 7°/1300lm 14°/1303lm																																																		
Photometric Curve  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>62865</td> <td>0.12</td> <td></td> </tr> <tr> <td>2</td> <td>15716</td> <td>0.24</td> <td></td> </tr> <tr> <td>3</td> <td>6985</td> <td>0.36</td> <td></td> </tr> <tr> <td>4</td> <td>3929</td> <td>0.48</td> <td></td> </tr> <tr> <td>5</td> <td>2515</td> <td>0.60</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>18792</td> <td>0.25</td> <td></td> </tr> <tr> <td>2</td> <td>4698</td> <td>0.50</td> <td></td> </tr> <tr> <td>3</td> <td>2088</td> <td>0.75</td> <td></td> </tr> <tr> <td>4</td> <td>1175</td> <td>1.00</td> <td></td> </tr> <tr> <td>5</td> <td>752</td> <td>1.25</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	62865	0.12		2	15716	0.24		3	6985	0.36		4	3929	0.48		5	2515	0.60			H(m)	E(lx)	D(m)	1	18792	0.25		2	4698	0.50		3	2088	0.75		4	1175	1.00		5	752	1.25		
	H(m)	E(lx)	D(m)																																															
1	62865	0.12																																																
2	15716	0.24																																																
3	6985	0.36																																																
4	3929	0.48																																																
5	2515	0.60																																																
	H(m)	E(lx)	D(m)																																															
1	18792	0.25																																																
2	4698	0.50																																																
3	2088	0.75																																																
4	1175	1.00																																																
5	752	1.25																																																

 	Model	MSL-V6																																																
	Wattage	55W																																																
	Input Voltage	220-240V~50/60Hz																																																
	Mounting Type	Track-mounted																																																
	Adjustment	Horizontal -270°~+270°, Vertical -80°~+80°																																																
	CCT	2700K/3000K/3500K/4000K/5000K																																																
	Weight	3.8Kg																																																
	Finish	Black/White																																																
Mark	      																																																	
Accessories	Honeycomb Light Tracker																																																	
Accessory Picture	 																																																	
Accessory Model	MS-V-OP0022 MS-V-OP0027																																																	
CCT	3000K																																																	
CRI	Ra93																																																	
Beam Angle	9°-34°																																																	
Luminaire Lumen	9°/3100lm	34°/3530lm																																																
Photometric Curve	 <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30796</td> <td>0.17</td> <td></td> </tr> <tr> <td>2</td> <td>7699</td> <td>0.34</td> <td></td> </tr> <tr> <td>3</td> <td>3422</td> <td>0.51</td> <td></td> </tr> <tr> <td>4</td> <td>1925</td> <td>0.68</td> <td></td> </tr> <tr> <td>5</td> <td>1232</td> <td>0.85</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8630</td> <td>0.59</td> <td></td> </tr> <tr> <td>2</td> <td>2158</td> <td>1.18</td> <td></td> </tr> <tr> <td>3</td> <td>959</td> <td>1.77</td> <td></td> </tr> <tr> <td>4</td> <td>539</td> <td>2.36</td> <td></td> </tr> <tr> <td>5</td> <td>345</td> <td>2.95</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	30796	0.17		2	7699	0.34		3	3422	0.51		4	1925	0.68		5	1232	0.85			H(m)	E(lx)	D(m)	1	8630	0.59		2	2158	1.18		3	959	1.77		4	539	2.36		5	345	2.95	
	H(m)	E(lx)	D(m)																																															
1	30796	0.17																																																
2	7699	0.34																																																
3	3422	0.51																																																
4	1925	0.68																																																
5	1232	0.85																																																
	H(m)	E(lx)	D(m)																																															
1	8630	0.59																																																
2	2158	1.18																																																
3	959	1.77																																																
4	539	2.36																																																
5	345	2.95																																																
CCT	4000K																																																	
Luminaire Lumen	9°/3350lm	34°/3810lm																																																
Photometric Curve	 <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33279</td> <td>0.17</td> <td></td> </tr> <tr> <td>2</td> <td>8320</td> <td>0.34</td> <td></td> </tr> <tr> <td>3</td> <td>3698</td> <td>0.51</td> <td></td> </tr> <tr> <td>4</td> <td>2080</td> <td>0.68</td> <td></td> </tr> <tr> <td>5</td> <td>1331</td> <td>0.85</td> <td></td> </tr> </tbody> </table>  <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>9310</td> <td>0.59</td> <td></td> </tr> <tr> <td>2</td> <td>2329</td> <td>1.18</td> <td></td> </tr> <tr> <td>3</td> <td>1035</td> <td>1.77</td> <td></td> </tr> <tr> <td>4</td> <td>582</td> <td>2.36</td> <td></td> </tr> <tr> <td>5</td> <td>373</td> <td>2.95</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	33279	0.17		2	8320	0.34		3	3698	0.51		4	2080	0.68		5	1331	0.85			H(m)	E(lx)	D(m)	1	9310	0.59		2	2329	1.18		3	1035	1.77		4	582	2.36		5	373	2.95	
	H(m)	E(lx)	D(m)																																															
1	33279	0.17																																																
2	8320	0.34																																																
3	3698	0.51																																																
4	2080	0.68																																																
5	1331	0.85																																																
	H(m)	E(lx)	D(m)																																															
1	9310	0.59																																																
2	2329	1.18																																																
3	1035	1.77																																																
4	582	2.36																																																
5	373	2.95																																																

 	Model	MSL-V7																								
	Wattage	27W																								
	Input Voltage	220-240V~50/60Hz																								
	Mounting Type	Track-mounted																								
	Adjustment	Horizontal -180°~+360°, Vertical -90°~+90°																								
	CCT	2700K/3000K/3500K/4000K/5000K																								
	Weight	2.0Kg																								
	Finish	Black/White																								
Mark	      																									
Accessories	Light Tracker																									
Accessory Picture																										
Accessory Model	MS-V-OP0027																									
CCT	3000K																									
CRI	Ra93																									
Beam Angle	6°																									
Luminaire Lumen	1150lm																									
Photometric Curve	 <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>57700</td> <td>0.11</td> <td></td> </tr> <tr> <td>2</td> <td>14425</td> <td>0.22</td> <td></td> </tr> <tr> <td>3</td> <td>6411</td> <td>0.33</td> <td></td> </tr> <tr> <td>4</td> <td>3606</td> <td>0.44</td> <td></td> </tr> <tr> <td>5</td> <td>2308</td> <td>0.55</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	57700	0.11		2	14425	0.22		3	6411	0.33		4	3606	0.44		5	2308	0.55	
	H(m)	E(lx)	D(m)																							
1	57700	0.11																								
2	14425	0.22																								
3	6411	0.33																								
4	3606	0.44																								
5	2308	0.55																								
CCT	4000K																									
Luminaire Lumen	1250lm																									
Photometric Curve	 <table border="1"> <thead> <tr> <th></th> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>62300</td> <td>0.11</td> <td></td> </tr> <tr> <td>2</td> <td>15575</td> <td>0.22</td> <td></td> </tr> <tr> <td>3</td> <td>6922</td> <td>0.33</td> <td></td> </tr> <tr> <td>4</td> <td>3894</td> <td>0.44</td> <td></td> </tr> <tr> <td>5</td> <td>2492</td> <td>0.55</td> <td></td> </tr> </tbody> </table>			H(m)	E(lx)	D(m)	1	62300	0.11		2	15575	0.22		3	6922	0.33		4	3894	0.44		5	2492	0.55	
	H(m)	E(lx)	D(m)																							
1	62300	0.11																								
2	15575	0.22																								
3	6922	0.33																								
4	3894	0.44																								
5	2492	0.55																								



Sek

Remote Controlled Track Spotlight

Mayalit

