

Mayalit



Xul mini

Crafted design for increase the uniformity of wall-washing lighting fixtures specifically for art exhibition lighting environments.



Xul Mini

Track Wallwasher


Xul MiniTrack Wallwasher

Deep understanding of exhibition needs
To provide more flexibility and convenience with the function of +/-vertical fine tuning



Simplistic Geometry, Symmetrical and Elegant

With the basic geometric elements, build the luminaire body pure appearance,
and create the symmetrical and comfortable proportion.

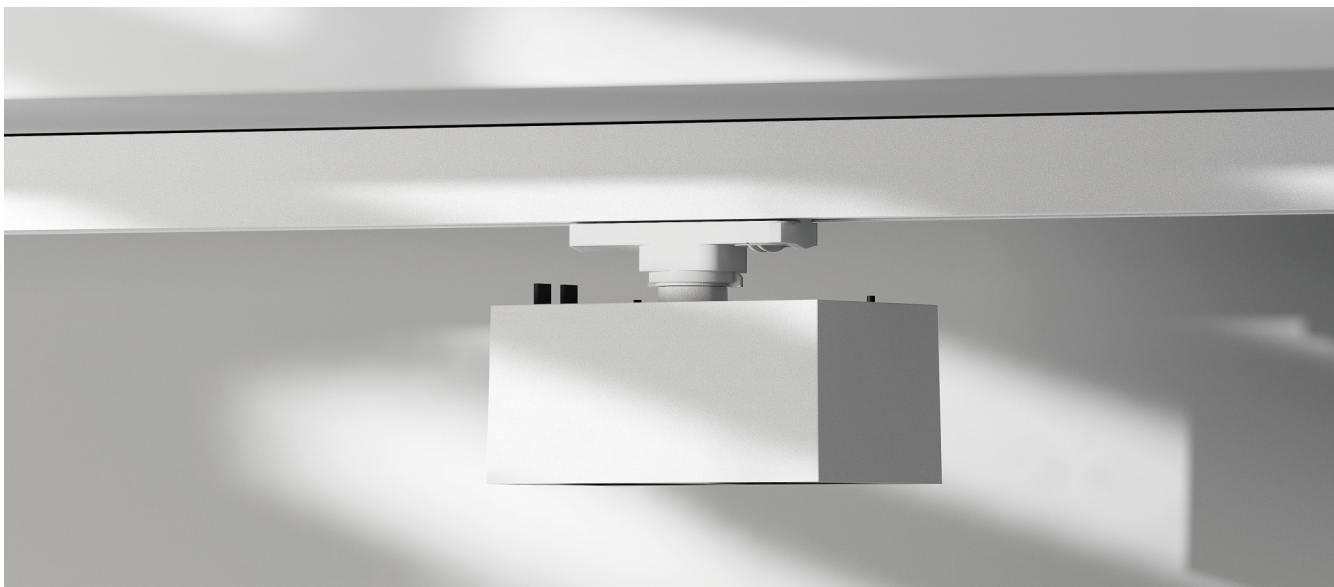

Pure white



Turn Complexity to Simplicity and Return to Plainness

The neutral black and white are integrated into the pure
and simple exhibition space ,which is peace and deep.



Low-key black


Optical Innovative Design, Bringing Excellent Uniformity

Reflective facade optical innovation design bring uniform, transparent, natural wallwashing effect and create ultimate visual comfort experience.




360° Horizontal Rotation

Additional 5° rotation space and beyond the 360° rotation limit, make sure every degree of circumference is controllable.

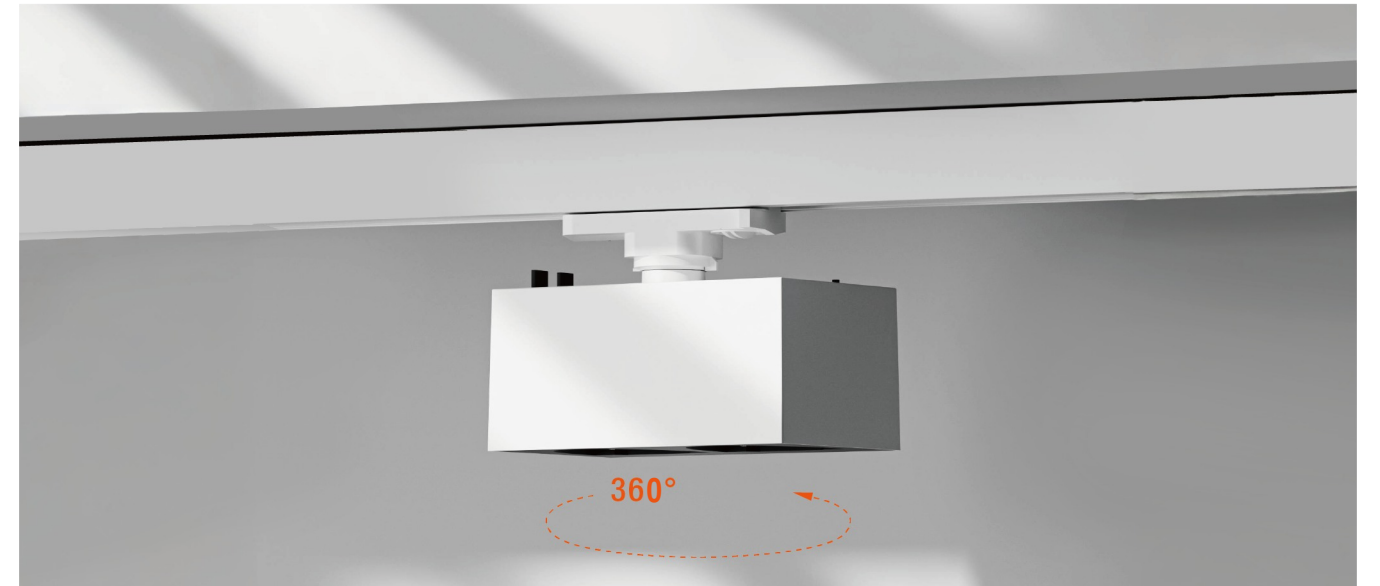


The Expression of Light and Shadow, Controlled with Ease.

Shade louvers can adjust the shading angle and anti-glare view, freely defining the illuminated area to achieve dynamic correction of the bright zone and the optimal wallwashing effect.

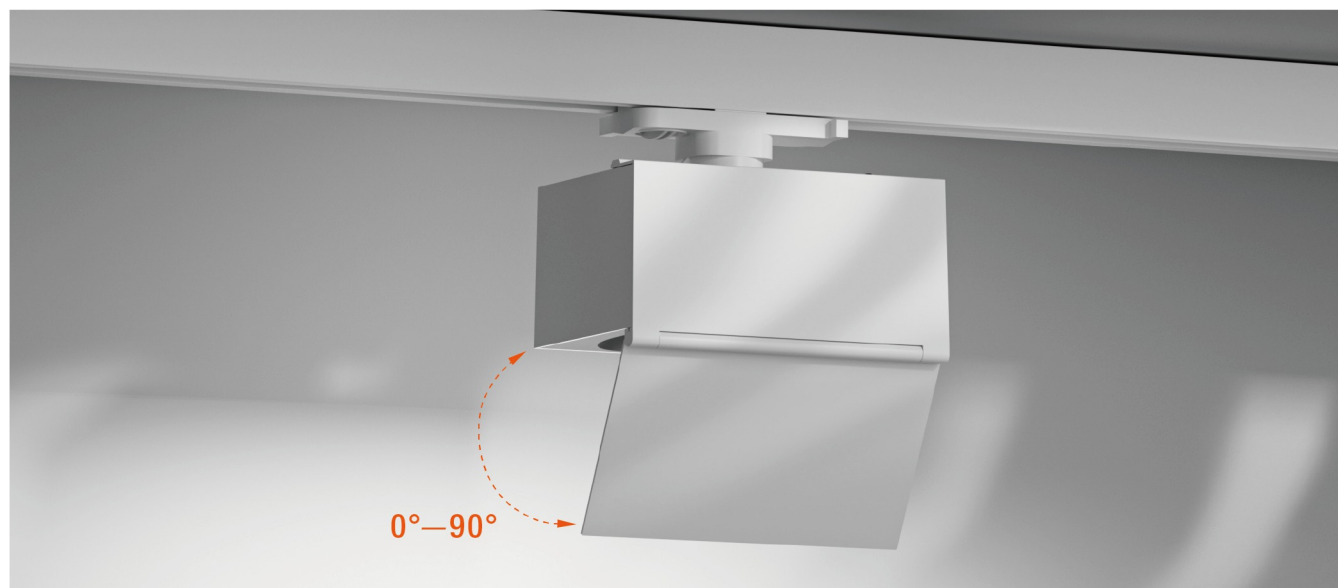

±12° Vertical Fine Tuning

Deep understanding of exhibition needs
To provide more flexibility and convenience with the function of ±12° extremely fine tuning.

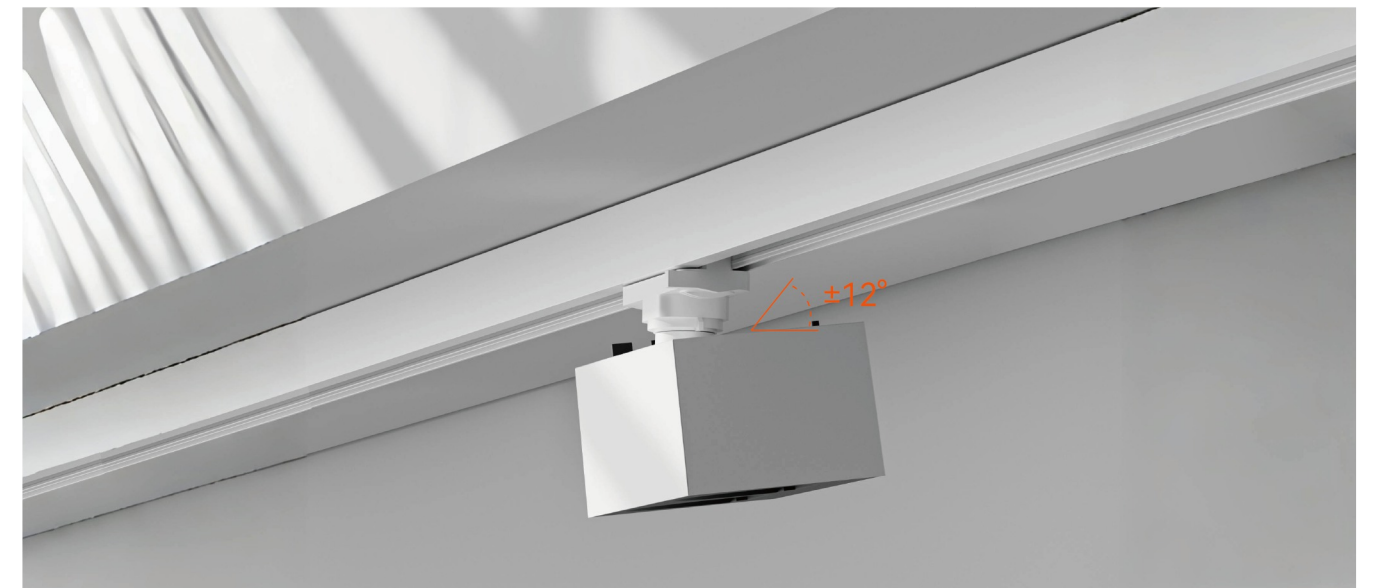

Essence of Light, Reflecting the True Self



Depending on the characteristics of the exhibits, precisely control the light intensity with a 1% dimming depth to perfectly present each exhibition.



2500-5000K wide color temperature adjustment, finely presenting the color and details of different exhibits, providing better flexibility for temporary exhibitions.






R9≥85, Ra95 light source color rendering Full-spectrum spectral distribution, restoring the true colors of exhibits 2SDCM color tolerance, providing better light color consistency.



Applications

Optimal installation ratio L:D:H = 1:1:4

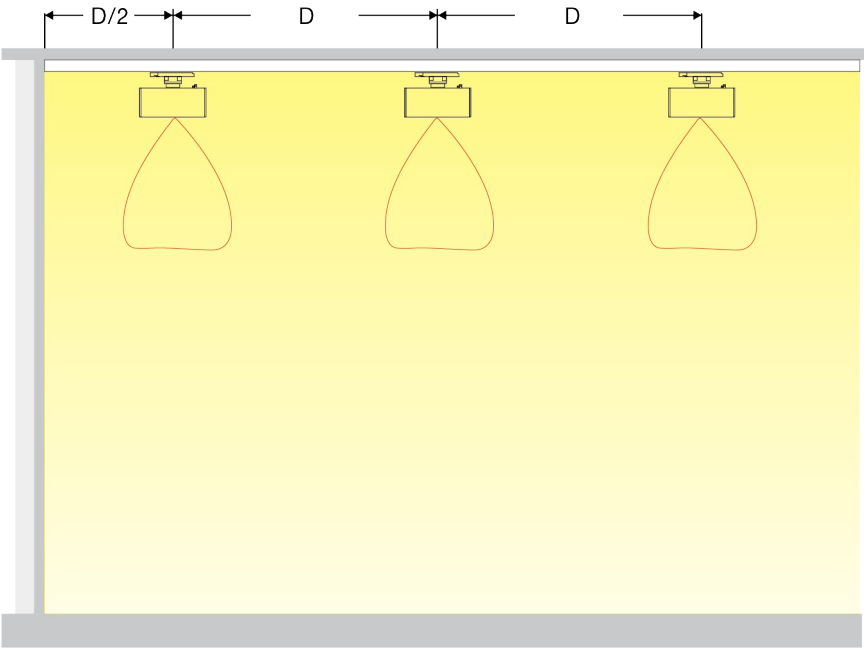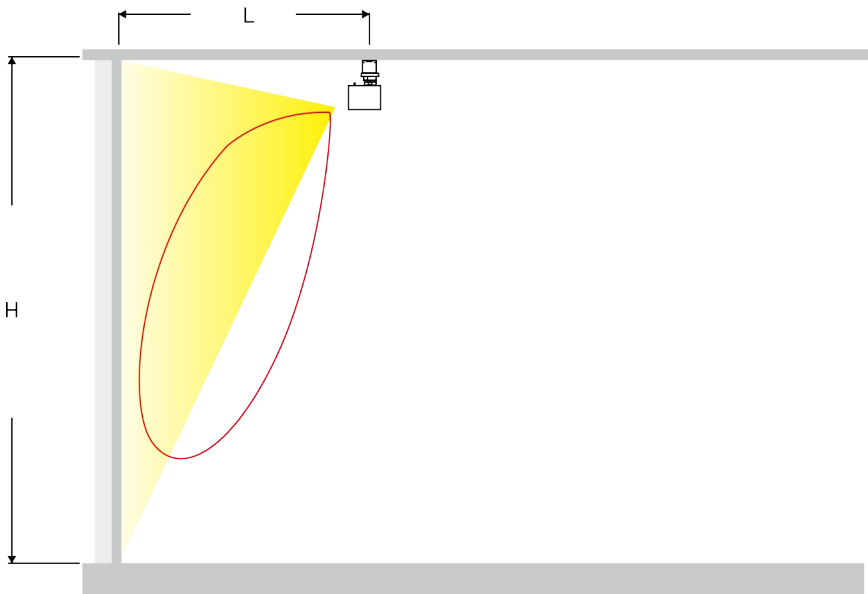

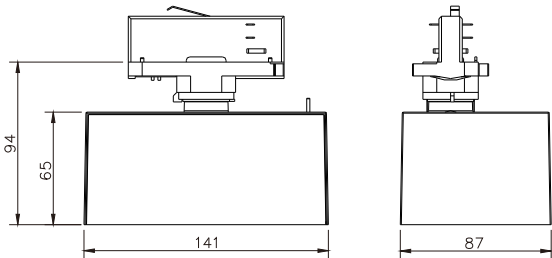







Xul Mini - Wall Washer


MXL40220

Wattage : 20W
Input Voltage : 220-240V~50/60Hz
Installation : Track mounted
Adjustable : Horizontal360°/ Vertical±12°
Weight : 0.70kg
Finish : MBK/MWT

Specification








3000K Ra97
4000K Ra95


Accessory



Lighting tool



Wallwash 789lm (3000K)
Wallwash 795lm (4000K)

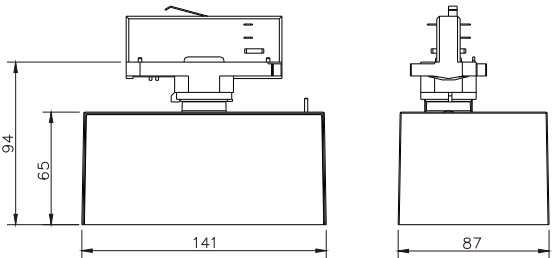








Xul Mini - Wall Washer


MXL40220CT (Tunable White)

Wattage : 20W
CCT : 2500K-5000K
Input Voltage : 220-240V~50/60Hz
Installation : Track mounted
Adjustable : Horizontal360°/ Vertical±12°
Weight : 0.70kg
Finish : MBK/MWT

Specification








3000K Ra97
4000K Ra95

Accessory



Lighting tool



Wallwash 760lm (3000K)
Wallwash 790lm (4000K)