




Pax

Modular design and infinite combinations —
Refine colours, multi-dimensional lighting distribution

Modular design of electrical and lighting modules




Flexible single & double-head combinations

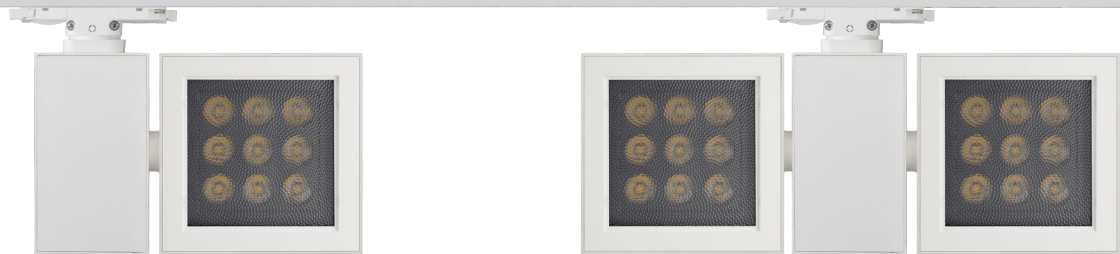


Omnidirectional Illumination

With triaxial adjustment (pan-tilt-roll) enables omnidirectional spatial projection

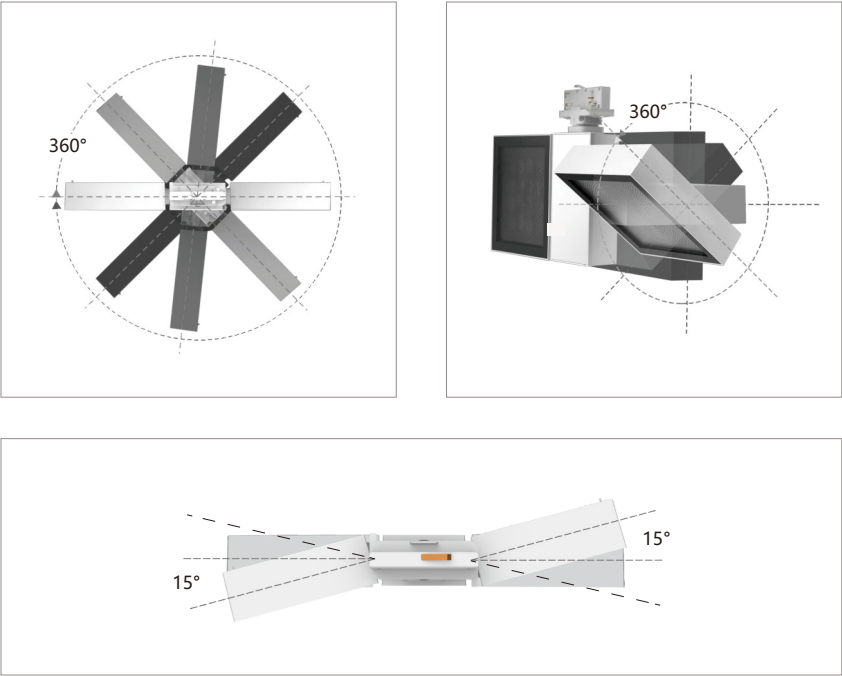

Features a push-lock optical module mechanism for tool-free access and swift lens replacement

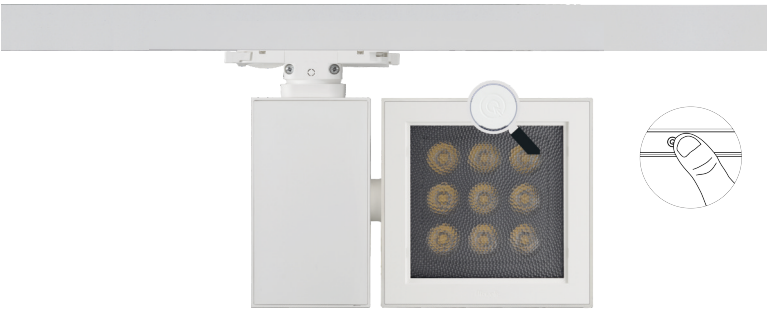




Pivot Hinge Technology

Our patented pivot hinge technology ensures smoother installation, enhanced stability, and robust safety for lighting fixtures.



High-Quality LED Chips

All products feature ultra-high color-rendering LED chips with CRI > Ra97 and R9 > 90, delivering true-to-life color reproduction for artistic displays.

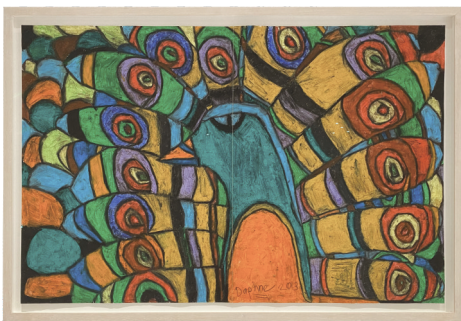

Ra90



Ra97

9 Optical Modules


Choose from 9 optical modules to meet diverse lighting needs for artworks and exhibitions. With exceptional scalability, our system eliminates redundant purchases and simplifies fixture selection.




6°




9°

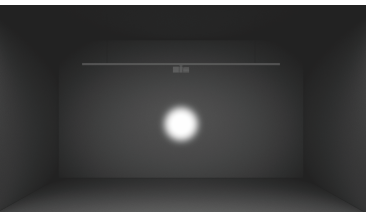


15°

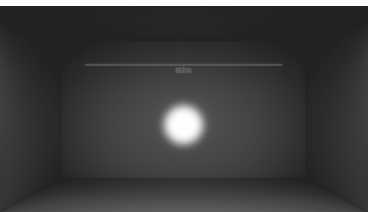

22°

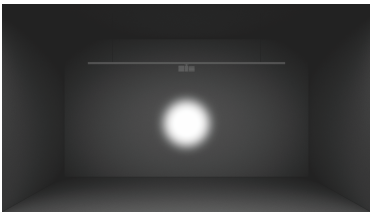

30°

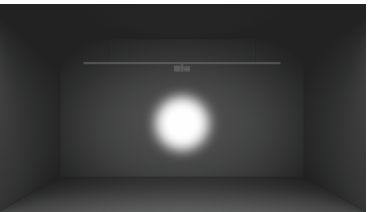

45°





60x16°



16x60°



Wallwash

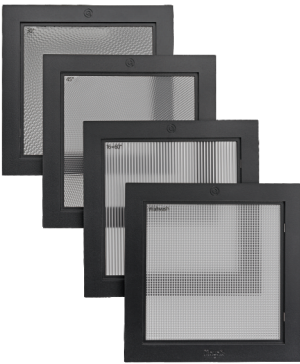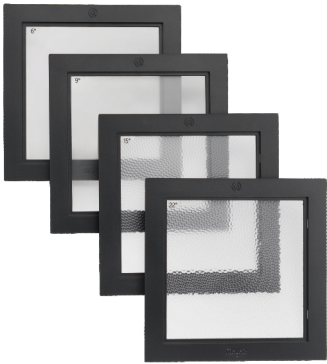



Sichuan Museum



Application Introduction

Pax series products, Featuring an innovative modular design and 9 optical modules, this series effortlessly adapts to the diverse lighting demands of varied artworks and dynamic exhibition formats.

Dimensions

	MPL40413
	124*124mm(max.670lm)
	MPL40923
	124*124mm(max.1300lm)

	CCT
	3000K

	Control
	On-board Dim

Photometric data

	Spotlights
	Narrow spot (approx. 6°)
	Spot (approx. 22°)
	Flood (approx. 30°)

	Floodlights
	Wide flood (approx. 45°)
	Oval flood (approx. 16°x60°)

	Lens wallwashers
	Wallwash



CRAFTSMANSHIP OF A GREAT NATION

走向新时代的 工艺美术

ARTS AND CRAFTS
TOWARDS
A NEW ERA

THE CHINESE TRADITIONAL CULTURE MUSEUM



Application Introduction

Pax series products, With dual-head configuration, the system supports versatile applications including different color temperatures, angles, and projection directions on both sides. Featuring doubled power output, it effortlessly addresses the challenges of ultra-high spaces.

Dimensions



MPL40413
124*124mm(max.670lm)
MPL40923
124*124mm(max.1300lm)



CCT
4000K



Control
On-board Dim

Photometric data





Spotlights
Narrow spot (approx. 6°)
Spot (approx. 22°)
Flood (approx. 30°)



Floodlights
Wide flood (approx. 45°)
Oval flood (approx. 16°x60°)



Lens wallwashers
Wallwash

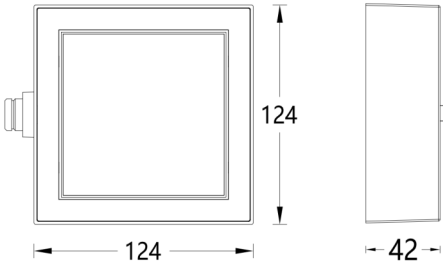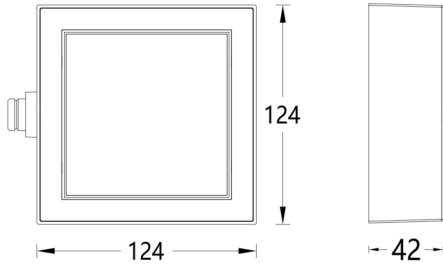


Pax - Track Spotlight



MPL40515

Wattage	: 15W
Input Voltage	: DC24V
Installation	: Track mounted
Adjustable	: Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight	: 0.55kg
Finish	: MBK/MWT


Accessory

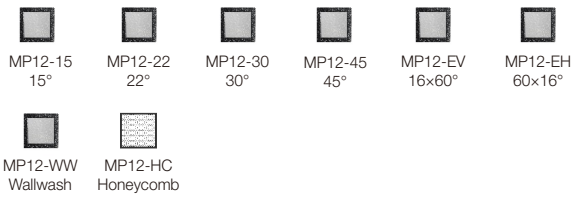

Specification



Lighting tool



15° 660lm (3000K)
15° 735lm (4000K)



22° 647lm (3000K)
22° 719lm (4000K)



30° 641lm (3000K)
30° 712lm (4000K)



45° 640lm (3000K)
45° 714lm (4000K)



EH(60×16°) 634lm (3000K)
EH(60×16°) 723lm (4000K)
EV(16×60°) 638lm (3000K)
EV(16×60°) 713lm (4000K)




Wallwash 632lm (3000K)
Wallwash 703lm (4000K)

Pax - Track Spotlight



MPL40923

Wattage	: 23W
Input Voltage	: DC24V
Installation	: Track mounted
Adjustable	: Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight	: 0.55kg
Finish	: MBK/MWT


Accessory

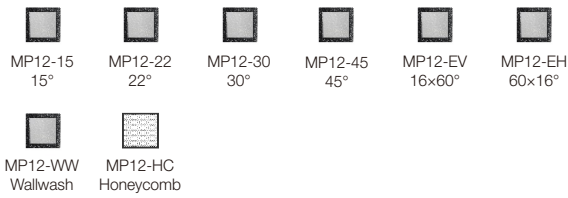

Specification



Lighting tool



15° 1290lm (3000K)
15° 1307lm (4000K)



22° 1259lm (3000K)
22° 1270lm (4000K)



30° 1241lm (3000K)
30° 1250lm (4000K)





45° 1240lm (3000K)
45° 1249lm (4000K)



EH(60×16°) 1228lm (3000K)
EH(60×16°) 1242lm (4000K)
EV(16×60°) 1236lm (3000K)
EV(16×60°) 1243lm (4000K)




Wallwash 1219lm (3000K)
Wallwash 1230lm (4000K)

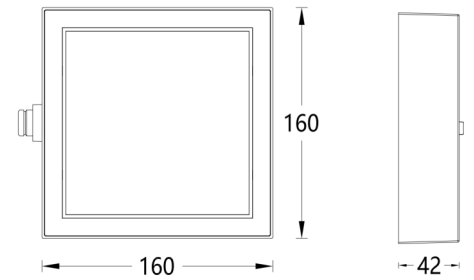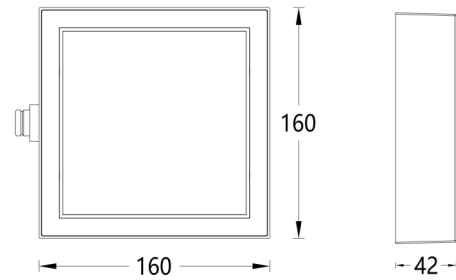


Pax - Track Spotlight MPL41230

Wattage	: 30W
Input Voltage	: DC24V
Installation	: Track mounted
Adjustable	: Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight	: 1.00kg
Finish	: MBK/MWT


Accessory

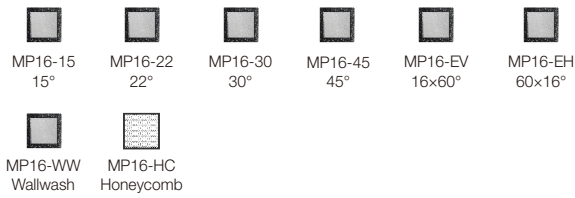

Specification




Lighting tool

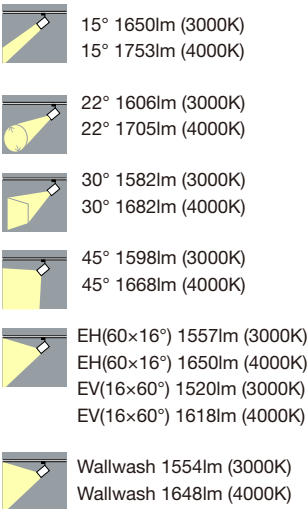



Pax - Track Spotlight MPL41648

Wattage	: 48W
Input Voltage	: DC24V
Installation	: Track mounted
Adjustable	: Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight	: 1.00kg
Finish	: MBK/MWT


Accessory

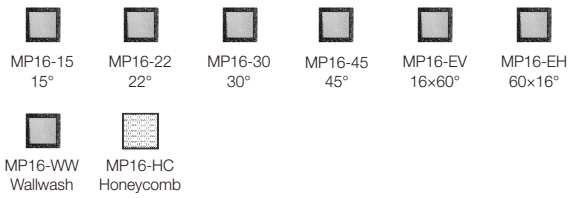


Specification



Lighting tool

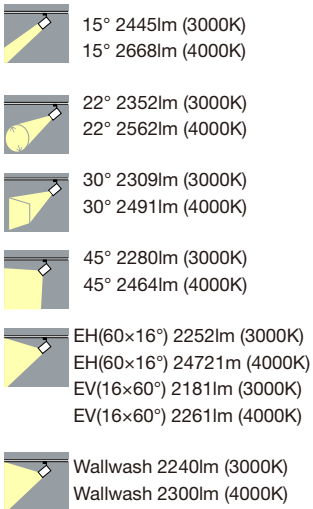


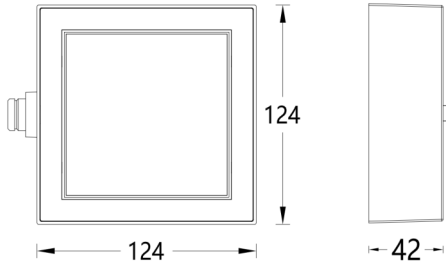


Pax - Track Spotlight
MPL40413

Wattage : 13W
Input Voltage : DC24V
Installation : Track mounted
Adjustable : Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight : 0.55kg
Finish : MBK/MWT


Specification



Lighting tool




Accessory

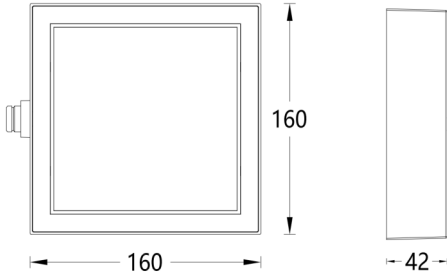


Pax - Track Spotlight
MPL40924

Wattage : 24W
Input Voltage : DC24V
Installation : Track mounted
Adjustable : Horizontal360°/ Vertical X axis360°/ Vertical Y axis±15°
Weight : 1.43kg
Finish : MBK/MWT


Specification





Lighting tool



Accessory



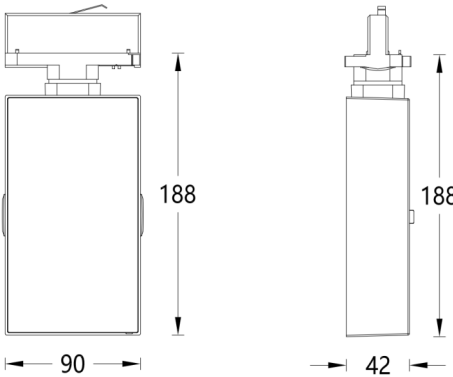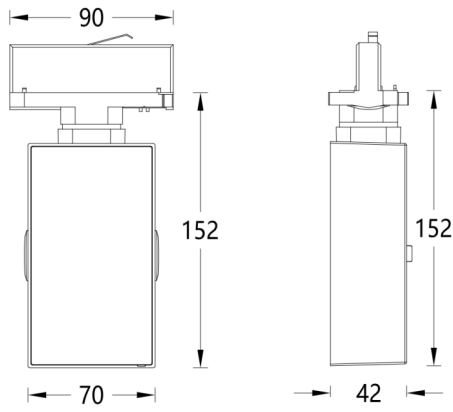

Pax - Track Spotlight
MPL4-45W

Wattage : Max 45W
Input Voltage : 220-240V~50/60Hz
Installation : Track mounted
Adjustable : Horizontal360°
Weight : 0.43kg
Finish : MBK/MWT

Specification





Pax - Track Spotlight
MPL4-95W

Wattage : Max 95W
Input Voltage : 220-240V~50/60Hz
Installation : Track mounted
Adjustable : Horizontal360°
Weight : 0.63kg
Finish : MBK/MWT

Specification



