
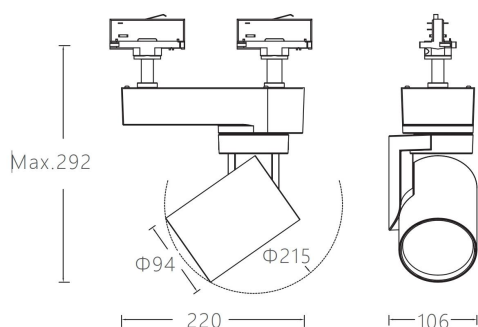



Products Series Sek / Guide rail remote control light**Project Name****Model No.** MSL-S6**Location**

7°



14°

**Description**

Light Source type	: LED COB
CCT	: 3000K/3500K/4000K (Optional)
CRI	: Ra 92
LED Lifetime	: >50000h (TM-21 standard)
UV Relative Content	: <1μW/lm
Blue light hazard	: RG1(Low Risk)
Wattage	: 31W (36W with Motors)
Beam angle	: 7°-14° (App Focus)
Input power	: 220 - 240V ~ 50/60Hz
Control mode	: APP Dimming and color adjustment
Dimming range	: 1%-100%
Installation	: Three-circuit rail-mounted
Adjustment Range	: Horizontal -90° ~ +90°/ Vertical -90° ~ +90°
Base Material	: Aluminum Alloy Die-Cast Lamp Body
Surface Finish	: Electrostatic Powder Coating;
Product Color	: Black/White (Optional)
Protection Rating	: IP20
Product Weight	: 1.8Kg
Operating APP	: SALIOT
Communication distance	: Device-to-Device 20m
Remove Devices	: iOS 10 or later (iPhone, iPad)