

Products Series Sek / Guide rail remote control light

Project Name

Model No. MSL-V6T

Location

Description



Light Source type: LED COB

CCT : 2700K-5000K

CRI : Ra 93

LED Lifetime : >50000h (TM-21 standard)

UV Relative Content : 0μW/lm

Blue light hazard: RG1 (Low Risk)

Wattage : 58W (69W with Motors)

Beam angle : 12°-30° (App Focus)

Input power : 220 - 240V ~ 50/60Hz

Control mode : APP Dimming and color adjustment

Dimming range: 1%-100%

Installation : Three-circuit rail-mounted

Movement angle: PAN 0° ~ ±270° / TILT 0° ~ ±80°

Base Material : Aluminum Alloy Die-Cast Lamp Body

Surface Finish : Electrostatic Powder Coating;

Product Color : Black/White (Optional)

Protection Rating: IP20


Product Weight: 3.8Kg

Operating APP : SALIOT

Communication Distance: Device-to-Device 20m



Remove Devices: iOS 10 or later (iPhone, iPad)

Special Function: Infrared tracking and positioning

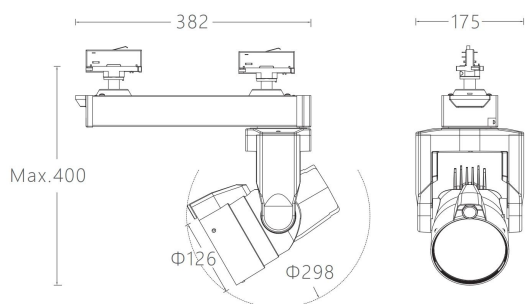

12°

30°



Product Accessories



MS-V-OP0022
Honeycomb



MS-V-OP0027
Light Catcher